
# K-STECKVERBINDU 1


Straight push-in connector

HANSA FLEX

## Lastnosti

| | |
|---|---|
| **delovni tlak** | Max. 16 bar |
| **delovna temperatura** | -20 °C to +80 °C |
| **Material:** | ponikljana medenina |
| **potisni obroč** | Hostaform |
| **vpenjalni obroč** | Stainless steel |



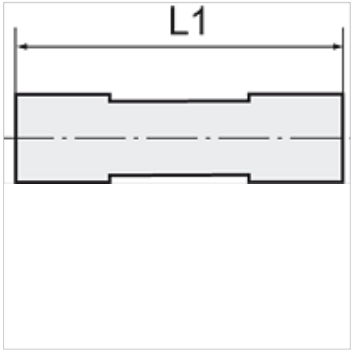


## Navodilo

Drugi podatki na zahtevo.

## Opis

The advanced version of our highly successful push-in fittings series manufactured in nickel-plated brass. Advantages of this new, optimised series: Much easier connection and disconnection of the hose, even with repeated mounting, can also be used for non-calibrated hoses, suitable for vacuum operation.

## Artikel

| Opis | Navoj | za zunanji Ø mm cevi | L1 (mm) |
|---|---|---|---|
| **K- 07 40 25 18** | M 8 x 0.75 | 3 mm | 18,4 |
| **K- 07 40 25 19** | M 11 x 1 | 4 mm | 30,6 |
| **K- 07 40 25 20** | M 14 x 1 | 5 mm | 33,5 |
| **K- 07 40 25 21** | M 13 x 1 | 6 mm | 33,0 |
| **K- 07 40 25 22** | M 15 x 1 | 8 mm | 35,7 |
| **K- 07 40 25 23** | M 17 x 1 | 10 mm | 39,2 |
| **K- 07 40 25 24** | M 20 x 1 | 12 mm | 39,7 |
| **K- 07 40 25 25** | M 24 x 1 | 14 mm | 45,9 |

*Kljub skrbnemu preverjanju napak ne moremo izključiti in za informacije, ki so tu navedene, ne prevzemamo nobene odgovornosti.*