
K-T-STECK VB 1

Union tees

Lastnosti

delovni tlak	Max. 16 bar
delovna temperatura	-20 °C to +150 °C
Material:	poniklјana medenina
potisni obroč	Nickel-plated brass
vpenjalni obroč	Stainless steel



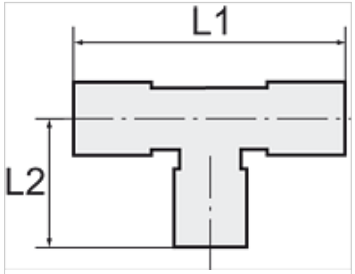

Navodilo

Drugi podatki na zahtevo.

Opis

Push-in fittings, manufactured entirely in nickel-plated brass. All parts with a parallel thread are supplied with an FPM O-ring.
All parts with conical threads are coated with preCOTE 5 dispersion, all fittings in this series can thus also be used at high temperatures (medium compressed air).

Artikel

Opis	za zunanji Ø mm cevi	L1 (mm)	L2 (mm)
K- 07 40 27 57	4 mm	34,0	17,0
K- 07 40 27 58	6 mm	39,0	19,5
K- 07 40 27 59	8 mm	46,0	23,0
K- 07 40 27 60	10 mm	50,0	25,0
K- 07 40 47 81	12 mm	54,0	27,0
K- 07 40 47 82	14 mm	62,0	31,0

Kljub skrbnemu preverjanju napak ne moremo izključiti in za informacije, ki so tu navedene, ne prevzemamo nobene odgovornosti.