


K-Y-STECK VB 10 BAR

Y unions (pressure max. 10 bar)

HANSA FLEX

Lastnosti

| | |
|---------------------|--|
| delovni tlak | Max. 10 bar |
| Območje uporabe | Air, vacuum |
| priporočene cevi | PU or PA (nylon) |
| Sredstva | Compressed air and all gases or liquids that are compatible with the materials |
| območje temperatur: | -20 °C to +80 °C |
| Material: | Plastic, Nickel plated brass |
| potisni obroč | Plastic |

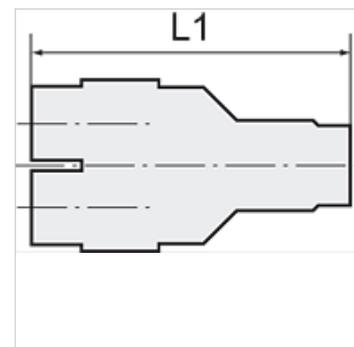

Navodilo

Drugi podatki na zahtevo.

Opis

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

Artikel

| Opis | za zunanji Ø mm cevi | L1 (mm) |
|----------------|----------------------|------------|
| K- 07 40 03 75 | 4 mm | 35,5 |
| K- 07 40 03 76 | 6 mm | 36,5 |
| K- 07 40 03 77 | 8 mm | 39,8 |
| K- 07 40 03 78 | 10 mm | 48,9 |
| K- 07 40 03 79 | 12 mm | 52,6 |
| K- 07 40 41 49 | 14 mm | 54,6 |
| K- 07 40 03 80 | 16 mm | 56,6 |