



K-SCHOTT-STECKVERB IG-K

Male bulkhead connectors, conical female thread

HANSA FLEX

Lastnosti

| | |
|---------------------|--|
| delovni tlak | Max. 15 bar, coarse vacuum |
| Območje uporabe | Air, vacuum |
| priporočene cevi | PU or PA (nylon) |
| Sredstva | Compressed air and all gases or liquids that are compatible with the materials |
| območje temperatur: | -20 °C to +80 °C |
| tesnilna ploskev | Conical version: thread coating |
| Material: | Plastic, Nickel plated brass |
| potisni obroč | Plastic |

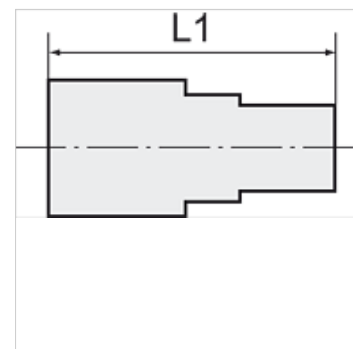

Navodilo

Drugi podatki na zahtevo.

Opis

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

Artikel

| Opis | Navoj | za zunanji Ø mm cevi | navoj stikalne plošče | L1 (mm) | zev ključa |
|----------------|--------|----------------------|-----------------------|---------|------------|
| K- 07 40 04 42 | Rc 1/8 | 4 mm | M 12 x 1 | 23,8 | 14 mm |
| K- 07 40 04 43 | Rc 1/8 | 6 mm | M 14 x 1 | 27,0 | 17 mm |
| K- 07 40 04 44 | Rc 1/8 | 8 mm | M 16 x 1 | 32,1 | 19 mm |
| K- 07 40 04 40 | Rc 1/4 | 6 mm | M 14 x 1 | 30,0 | 17 mm |
| K- 07 40 04 41 | Rc 1/4 | 8 mm | M 16 x 1 | 35,1 | 19 mm |
| K- 07 40 04 38 | Rc 1/4 | 10 mm | M 20 x 1 | 36,0 | 24 mm |
| K- 07 40 04 39 | Rc 1/4 | 12 mm | M 22 x 1 | 38,1 | 24 mm |
| K- 07 40 04 45 | Rc 3/8 | 10 mm | M 20 x 1 | 37,0 | 24 mm |
| K- 07 40 04 46 | Rc 3/8 | 12 mm | M 22 x 1 | 39,1 | 24 mm |
| K- 07 40 04 37 | Rc 1/2 | 12 mm | M 22 x 1 | 41,1 | 24 mm |