


# K-Y-STECK VB STECKNIP RED

Y unions with push-in plug, unequal

**HANSA FLEX**

## Lastnosti

|                     |                                                                                |
|---------------------|--------------------------------------------------------------------------------|
| delovni tlak        | Max. 15 bar, coarse vacuum                                                     |
| Območje uporabe     | Air, vacuum                                                                    |
| priporočene cevi    | PU or PA (nylon)                                                               |
| Sredstva            | Compressed air and all gases or liquids that are compatible with the materials |
| območje temperatur: | -20 °C to +80 °C                                                               |
| Material:           | Plastic, Nickel plated brass                                                   |
| potisni obroč       | Plastic                                                                        |

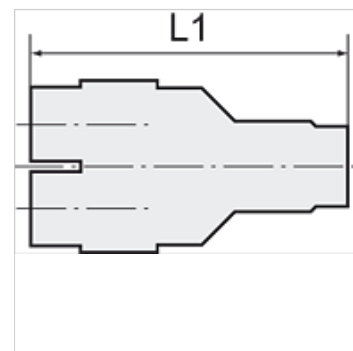

## Navodilo

Drugi podatki na zahtevo.

## Opis

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

## Artikel

| Opis           | za zunanji Ø mm cevi | L1<br>(mm) | vtični priključek<br>(mm) |
|----------------|----------------------|------------|---------------------------|
| K- 07 40 04 98 | 4 mm                 | 53,7       | 6                         |
| K- 07 40 04 99 | 6 mm                 | 60,4       | 8                         |
| K- 07 40 05 00 | 8 mm                 | 72,3       | 10                        |
| K- 07 40 05 01 | 10 mm                | 77,0       | 12                        |