


K-L-MEHRFACHVERT 3 DR AGR OR CLICK

Multiple union elbows with inner hex, 3 outlets, swivel type, parallel male thread with O-ring

HANSA FLEX

Lastnosti

| | |
|---------------------|---------------------|
| delovni tlak | Max. 16 bar |
| delovna temperatura | -20 °C to +80 °C |
| Material: | ponikljana medenina |
| potisni obroč | Hostaform |
| tesnilni obroč | NBR |
| vpenjalni obroč | Stainless steel |

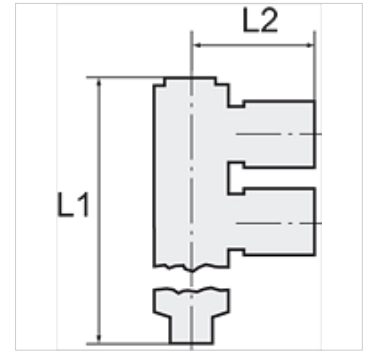

Navodilo

Drugi podatki na zahtevo.

Opis

The advanced version of our highly successful push-in fittings series manufactured in nickel-plated brass. Advantages of this new, optimised series: Much easier connection and disconnection of the hose, even with repeated mounting, can also be used for non-calibrated hoses, suitable for vacuum operation.

Artikel

| Opis | Navoj | za zunanji Ø mm cevi | L1 (mm) | L2 (mm) | zev ključa |
|----------------|-------|----------------------|------------|------------|------------|
| K- 07 40 26 61 | G 1/8 | 4 mm | 56,7 | 20,2 | 3 mm |
| K- 07 40 26 62 | G 1/8 | 6 mm | 56,7 | 23,5 | 3 mm |
| K- 07 40 26 63 | G 1/8 | 8 mm | 56,7 | 24,8 | 3 mm |
| K- 07 40 26 59 | G 1/4 | 6 mm | 64,3 | 25,6 | 4 mm |
| K- 07 40 26 60 | G 1/4 | 8 mm | 64,3 | 26,5 | 4 mm |
| K- 07 40 26 58 | G 1/4 | 10 mm | 64,3 | 31,4 | 4 mm |