


K-DRG PNEU FERNGEST MULTIFIX

Pressure regulators with pneumatic remote control

HANSA FLEX

Lastnosti

vstopni tlak	Max. 16 bar
izhodni tlak	corresponds to the set pressure of the pilot pressure regulator
temperatura medija	max. 60 °C
temperatura okolice	Max. 60 °C
tesnilni material	NBR
ohišje	Die-cast zinc, Aluminium for G 1 variant
meritev pretoka	At P1 = 8 bar, P2 = 6 bar and pressure drop Δp = 1 bar
priključek za krmilni zrak	G 1/8

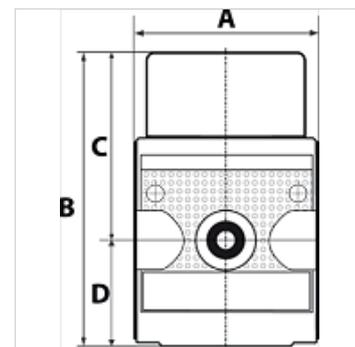

Navodilo

Drugi podatki na zahtevo.

Opis

Diaphragm pressure regulator, self-relieving, with pneumatic remote control. The pressure is set with a pilot pressure regulator (1:1 ratio). Either a standard or a precision pressure regulator can be used to regulate the pilot pressure.

Artikel

Opis	Navoj	pretok (L/min)	A (mm)	B	C (mm)	D (mm)
K- 07 25 19 56	G 1/4	1800	48,0	75,0 mm	48,0	27,0
K- 07 25 19 57	G 1/2	4800	69,0	94,0 mm	59,0	35,0
K- 07 25 19 58	G 1	12500	100,0	112,0 mm	60,0	52,0

Nadomestni deli

K-HALTERBAUSATZ MULTIFIX	Holder
K-KOPPELPAKET MEHR	Coupling packet
K-VERSCHLEI-SATZ MULTIFIX	Set of wearing parts »multifix«