
K-VTST 4 AB MS

Distributor pieces, brass, with 4 outlets

Lastnosti

Priključek	G 3/4 and G 1 incl. PTFE-sealing at outer thread, G 1 1/4 without sealing
Obratovalni tlak	maks. 10 bar



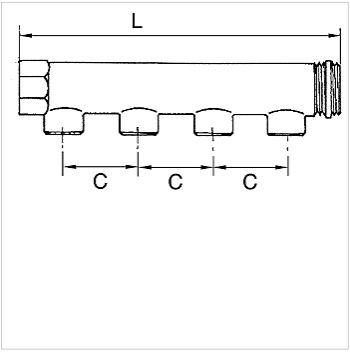

Navodilo

Drugi podatki na zahtevo.

Opis

For assembling compressed air taps.End fittings with 1 x male and 1 x female thread, outlets optionally with male or female thread.

Artikel

Opis	izhodni priključek	vhodni priključek	C (mm)	L (mm)
K- 07 40 52 85	4 x 1/2 male	2 x 3/4	50,0	210,0
K- 07 40 52 86	4 x 1/2 female	2 x 3/4	50,0	210,0
K- 07 40 52 87	4 x 1/2 male	2 x 1	50,0	213,0
K- 07 40 52 88	4 x 1/2 female	2 x 1	50,0	213,0
K- 07 40 52 89	4 x 1/2 male	2 x 1 1/4	60,0	257,0
K- 07 40 52 90	4 x 1/2 female	2 x 1 1/4	60,0	257,0

Kljub skrbnemu preverjanju napak ne moremo izključiti in za informacije, ki so tu navedene, ne prevzemamo nobene odgovornosti.