# K-MUFFEN SK
Sockets with outer hex

## Lastnosti

| | |
|---|---|
| **delovni tlak** | 10 bar |
| **temperatura medija** | max. +90 °C |
| **temperatura okolice** | Max. +90 °C |
| **Material:** | Brass with a bare metal surface |



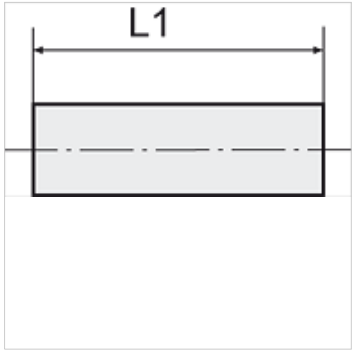


## Navodilo

The dimensions of the standard screw fittings may change slightly during the life of the catalogue as a result of optimisation processes.
Drugi podatki na zahtevo.

## Dodatne informacije

Further types and dimensions on request.

## Artikel

| Opis | Navoj | L1 (mm) | zev ključa |
|---|---|---|---|
| **K- 07 40 00 41** | M 5 | 12,0 | 8 mm |
| **K- 07 40 00 42** | G 1/8 | 22,0 | 14 mm |
| **K- 07 40 00 43** | G 1/4 | 26,0 | 17 mm |
| **K- 07 40 00 44** | G 3/8 | 26,0 | 22 mm |
| **K- 07 40 00 45** | G 1/2 | 30,0 | 27 mm |
| **K- 07 40 00 46** | G 3/4 | 36,0 | 32 mm |
| **K- 07 40 00 47** | G 1 | 40,0 | 41 mm |

*Kljub skrbnemu preverjanju napak ne moremo izključiti in za informacije, ki so tu navedene, ne prevzemamo nobene odgovornosti.*