
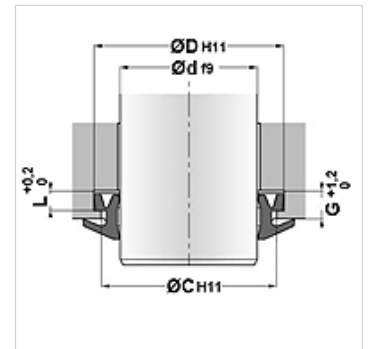


## Lastnosti

<b>Način izdelave</b>	Strgalo
<b>Drсна hitrost max.</b>	4,0 m/s
<b>Temperatura min.</b>	-40 °C
<b>Temperatura max.</b>	110 °C
<b>Sredstva</b>	mineralno olje
<b>Montaža</b>	strgalo ukrivite v obliki ledvice in ga vtisnite v utor
<b>Uporaba</b>	For the usage at higher pollution, for e.g.: Mining foundries
<b>Material:</b>	PU 93° Shore A



## Artikel

Opis	C (mm)	D (mm)	d (mm)	G (mm)	H (mm)	L (mm)
WUH-26	32,0	34,0	26	5,00	8,7	4,0
WUH-30	36,0	38,0	30	5,00	8,7	4,0
WUH-32	38,0	40,0	32	5,00	8,7	4,0
WUH-36	42,0	44,0	36	5,00	8,7	4,0
WUH-40	46,0	48,0	40	5,00	8,7	4,0
WUH-45	51,0	53,0	45	5,00	8,7	4,0
WUH-50	56,0	58,0	50	5,00	8,7	4,0
WUH-52	58,0	60,0	52	5,00	8,7	4,0
WUH-56	62,0	64,0	56	5,00	8,7	4,0
WUH-60	66,0	68,0	60	5,00	8,7	4,0
WUH-68	74,0	76,0	68	5,00	8,7	4,0
WUH-70	76,0	78,0	70	5,00	8,7	4,0
WUH-75	81,0	83,0	75	5,00	8,7	4,0
WUH-80	86,0	88,0	80	5,00	8,7	4,0
WUH-100	107,0	110,0	100	8,10	11,7	6,3