

K-2-BK V DURCHG INFI

2/2-way ball valve Ø 20 mm - Ø 63 mm full bore

HANSA FLEX

Lastnosti

Sredstva Compressed air, vacuum, inert gases

Obratovalni tlak -0,99 bar - 15 bar

območje temperatur: -20 °C to +80 °C

tesnilo NBR


ohišje Nickel-plated brass

zatični obroč Stainless steel 1.4301

matica Aluminium

tesnilni obroč NBR

varovalni obroč Technopolymer

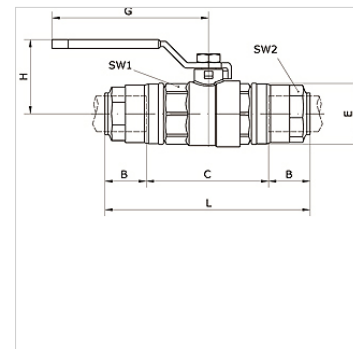

Artikel

Opis	zunANJI Ø cevi	B (mm)	C (mm)	DN	E (mm)	G (mm)	H (mm)	L (mm)	zEV ključa 1 (mm)	zEV ključa 2 (mm)
K- 07 40 55 05	63 mm	57,5	38,0	59	94,0	240	111,5	232,0	89	75