


K-2-BK V DURCHG INFI

2/2-way ball valve Ø 20 mm - Ø 63 mm full bore

HANSA FLEX

Lastnosti

| | |
|----------------------------|-------------------------------------|
| Sredstva | Compressed air, vacuum, inert gases |
| Obratovalni tlak | -0,99 bar - 15 bar |
| območje temperatur: | -20 °C to +80 °C |
| tesnilo | NBR |
| ohišje | Nickel-plated brass |
| zatični obroč | Stainless steel 1.4301 |
| matica | Aluminium |
| tesnilni obroč | NBR |
| varovalni obroč | Technopolymer |

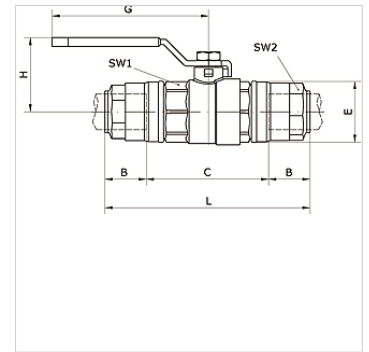

Artikel

| Opis | zunANJI Ø cevi | B (mm) | C (mm) | DN | E (mm) | G (mm) | H (mm) | L (mm) | zEV ključa 1 (mm) | zEV ključa 2 (mm) |
|-----------------------|----------------|-----------|-----------|----|-----------|-----------|-----------|-----------|----------------------|----------------------|
| K- 07 40 55 05 | 63 mm | 57,5 | 38,0 | 59 | 94,0 | 240 | 111,5 | 232,0 | 89 | 75 |