


# K-3WBK HANSA PRO

3/2-way ball valve, HANSA PRO

**HANSA FLEX**

## Lastnosti

<b>Sredstva</b>	stisnjen zrak
<b>vrsta pritrditve</b>	Line mounting, mounting kit or wall mounting
<b>sprožitev / varovalka</b>	lockable with key lock
<b>Vgradna lega</b>	Any
<b>nazivni pretok G 1/2</b>	11.000 l/min (P1 = 6 bar/Delta P = 1 bar)
<b>nazivni pretok G 3/8</b>	7.250 l/min (P1 = 6 bar/Delta P = 1 bar)
<b>PE maks. 11</b>	16 bar

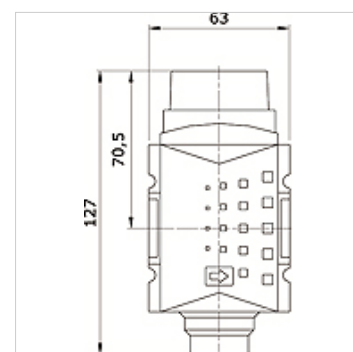

## Artikel

Opis	Priključek	Velikost
K- 07 25 22 54	G 3/8 i	2
K- 07 25 22 55	G 1/2 i	2

## Pribor

**K-STECKSCHLOSS** Key lock