


K-AFSV HANSA PRO

Start-up poppet valve, HANSA PRO

HANSA FLEX

Lastnosti

| | |
|----------------------|--|
| temperatura medija | -10 °C to +50 °C |
| temperatura okolice | -10 °C to +50 °C |
| Sredstva | stisnjen zrak |
| Način izdelave | Operated by secondary pressure |
| vrsta pritrditve | Line mounting, mounting kit or wall mounting |
| Vgradna lega | Any |
| nazivni pretok G 1/2 | 5.200 l/min (P1 = 6 bar/Delta P = 1 bar) |
| nazivni pretok G 3/8 | 4.300 l/min (P1 = 6 bar/Delta P = 1 bar) |
| PE maks. 11 | 16 bar |
| ohišje | PA66 |

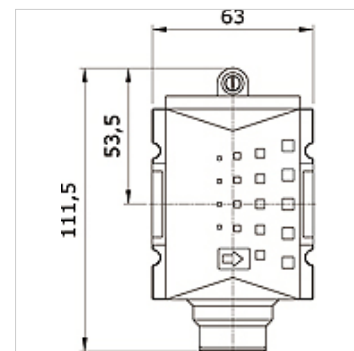

Artikel

| Opis | Priključek | Velikost |
|----------------|------------|----------|
| K- 07 25 22 60 | G 3/8 i | 2 |
| K- 07 25 22 61 | G 1/2 i | 2 |