


K-FI FEIN HANSA PRO

Compressed air fine filter, with manual/semi-automatic condensate drain, HANSA PRO

HANSA FLEX

Lastnosti

| | |
|----------------------|----------------------------------------------|
| temperatura medija | -10 °C to +50 °C |
| temperatura okolice | -10 °C to +50 °C |
| Sredstva | stisnjen zrak |
| Način izdelave | fiber filter |
| vrsta pritrditve | Line mounting, mounting kit or wall mounting |
| Vgradna lega | Vertical, drain down |
| finoča filtra | 0,01 µm |
| izkoristek filtra | 99.999 % |
| nazivni pretok G 1/2 | 750 l/min (P1 = 6 bar/Delta P = 0,1 bar) |
| nazivni pretok G 3/8 | 750 l/min (P1 = 6 bar/Delta P = 0,1 bar) |
| Pe maks. | 16 bar |
| filtrirni element | Borsilicate-Al |
| ohišje | PA66 |
| preostanek olja | 0,01 mg/m3 |

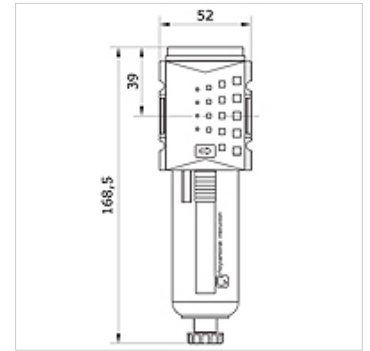

Artikel

| Opis | Priključek | posoda | Velikost | izpust kondenzata |
|----------------|------------|------------------------------------|----------|-------------------------|
| K- 07 25 21 28 | G 3/8 i | polycarbonate with protective cage | 2 | manual / semi-automatic |
| K- 07 25 21 29 | G 1/2 i | polycarbonate with protective cage | 2 | manual / semi-automatic |
| K- 07 25 21 30 | G 3/8 i | zinc with visual display | 2 | manual / semi-automatic |
| K- 07 25 21 31 | G 1/2 i | zinc with visual display | 2 | manual / semi-automatic |