


# K-G STECK 20-63 AG INFI

Straight push-in connector Ø 20 mm – Ø 63 mm with external thread

**HANSA FLEX**

## Lastnosti

|                     |                                     |
|---------------------|-------------------------------------|
| Sredstva            | Compressed air, vacuum, inert gases |
| Obratovalni tlak    | -0,99 bar - 15 bar                  |
| območje temperatur: | -20 °C to +80 °C                    |
| tesnilo             | NBR                                 |
| ohišje              | Nickel-plated brass                 |
| zatični obroč       | Stainless steel 1.4301              |
| matica              | Nickel-plated brass                 |
| tesnilni obroč      | NBR                                 |
| varovalni obroč     | Technopolymer                       |

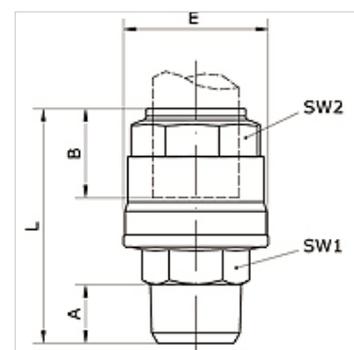

## Artikel

| Opis           | zunanjí Ø cevi | Priključek | A<br>(mm) | B<br>(mm) | E<br>(mm) | L<br>(mm) | zav ključa 1<br>(mm) | zav ključa 2<br>(mm) |
|----------------|----------------|------------|-----------|-----------|-----------|-----------|----------------------|----------------------|
| K- 07 40 53 37 | 20 mm          | R 1/2      | 14,0      | 31,5      | 34,5      | 56,0      | 22                   | 30                   |
| K- 07 40 53 38 | 25 mm          | R 3/4      | 16,5      | 38,5      | 42,5      | 66,0      | 27                   | 35                   |
| K- 07 40 53 39 | 32 mm          | R 1        | 19,0      | 46,0      | 52,0      | 76,5      | 34                   | 45                   |
| K- 07 40 53 40 | 40 mm          | R 1 1/4    | 21,5      | 52,0      | 63,0      | 89,5      | 45                   | 55                   |
| K- 07 40 53 41 | 40 mm          | R 1 1/2    | 21,5      | 52,0      | 63,0      | 92,0      | 50                   | 55                   |
| K- 07 40 53 42 | 50 mm          | R 1 1/2    | 21,5      | 63,5      | 73,0      | 105,0     | 50                   | 65                   |