


K-NEBELOELER HANSA PRO

Mist lubricator, HANSA PRO

HANSA FLEX

Lastnosti

| | |
|------------------------------------|--|
| vstopni tlak | Pe max. 16 bar |
| temperatura medija | -10 °C to +50 °C |
| temperatura okolice | -10 °C to +50 °C |
| Sredstva | stisnjen zrak |
| Način izdelave | After having suction pressure |
| Vgradna lega | vertically |
| maks. količina olja | 80 cc |
| nazivni pretok G 1/2 | 8.000 l/min (P1 = 6 bar/Delta P = 1 bar) |
| nazivni pretok G 3/8 | 8.000 l/min (P1 = 6 bar/Delta P = 1 bar) |
| doziranje olja pri qv = vrsta olja | 1-2 drops / min (guideline) |
| ohišje | PA66 |
| kapalni nastavek | Polycarbonate |
| vrsta olja | CL 32 acc. to DIN 51517 - ISO VG 32 |

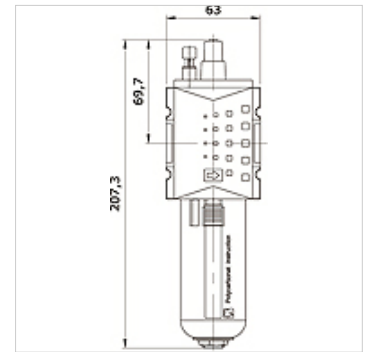

Artikel

| Opis | Priključek | posoda | Velikost |
|----------------|------------|------------------------------------|----------|
| K- 07 25 21 84 | G 3/8 i | polycarbonate with protective cage | 2 |
| K- 07 25 21 85 | G 1/2 i | polycarbonate with protective cage | 2 |
| K- 07 25 21 86 | G 3/8 i | zinc with visual display | 2 |
| K- 07 25 21 87 | G 1/2 i | zinc with visual display | 2 |