



# K-STECK VB 20-63 INFI

Straight push-in connector Ø 20 mm – Ø 63 mm

**HANSA FLEX**

## Lastnosti

<b>Sredstva</b>	Compressed air, vacuum, inert gases
<b>Obratovalni tlak</b>	-0,99 bar - 15 bar
<b>območje temperatur:</b>	-20 °C to +80 °C
<b>tesnilo</b>	NBR
<b>ohišje</b>	Aluminium
<b>zatični obroč</b>	Stainless steel 1.4301
<b>matica</b>	Aluminium
<b>tesnilni obroč</b>	NBR
<b>varovalni obroč</b>	Technopolymer

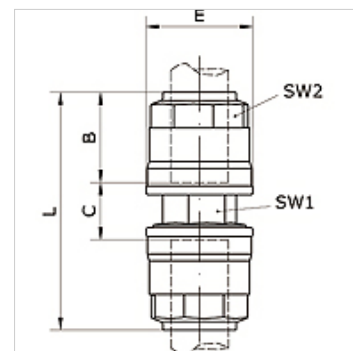

## Artikel

Opis	zunANJI Ø cevi	B (mm)	C (mm)	E (mm)	L (mm)	zEV ključA 1 (mm)	zEV ključA 2 (mm)
K- 07 40 54 97	63 mm	57,5	44,0	94,0	159,0	73	75