

K-STECK VB 20-63 INFI

Straight push-in connector \varnothing 20 mm – \varnothing 63 mm

HANSA FLEX

Lastnosti

Sredstva Compressed air, vacuum, inert gases

Obratovalni tlak -0,99 bar - 15 bar

območje temperatur: -20 °C to +80 °C

tesnilo NBR


ohišje Aluminium

zatični obroč Stainless steel 1.4301

matica Aluminium

tesnilni obroč NBR

varovalni obroč Technopolymer

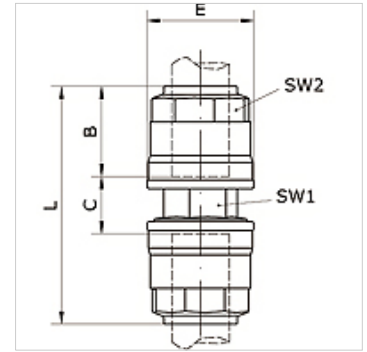

Artikel

Opis	zunANJI \varnothing cevi	B (mm)	C (mm)	E (mm)	L (mm)	zEV ključA 1 (mm)	zEV ključA 2 (mm)
K- 07 40 54 97	63 mm	57,5	44,0	94,0	159,0	73	75