


# K-STECK VS ABLASS 20-63 INFI

press-lock Ø 20 mm – Ø 63 mm with condensate drain

**HANSA FLEX**

## Lastnosti

|                            |                                     |
|----------------------------|-------------------------------------|
| <b>Sredstva</b>            | Compressed air, vacuum, inert gases |
| <b>Obratovalni tlak</b>    | -0,99 bar - 15 bar                  |
| <b>območje temperatur:</b> | -20 °C to +80 °C                    |
| <b>tesnilo</b>             | NBR                                 |
| <b>ohišje</b>              | Nickel-plated brass                 |
| <b>zatični obroč</b>       | Stainless steel 1.4301              |
| <b>matica</b>              | Nickel-plated brass                 |
| <b>tesnilni obroč</b>      | NBR                                 |
| <b>varovalni obroč</b>     | Technopolymer                       |

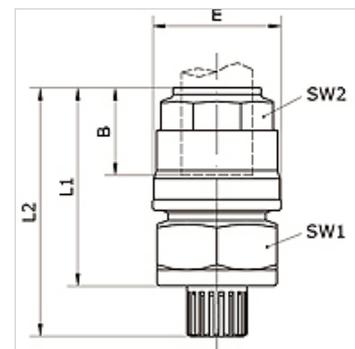

## Artikel

| Opis                  | zunANJI Ø cevi | B<br>(mm) | E<br>(mm) | L1<br>(mm) | L2<br>(mm) | zEV ključA 1<br>(mm) | zEV ključA 2<br>(mm) |
|-----------------------|----------------|-----------|-----------|------------|------------|----------------------|----------------------|
| <b>K- 07 40 53 86</b> | 20 mm          | 36,0      | 34,5      | 52,5       | 67,0       | 32                   | 30                   |
| <b>K- 07 40 53 87</b> | 25 mm          | 38,5      | 42,5      | 57,5       | 72,0       | 32                   | 35                   |
| <b>K- 07 40 53 88</b> | 32 mm          | 46,0      | 52,0      | 67,5       | 82,0       | 38                   | 45                   |
| <b>K- 07 40 53 89</b> | 40 mm          | 52,0      | 63,0      | 77,0       | 91,5       | 50                   | 55                   |
| <b>K- 07 40 53 90</b> | 50 mm          | 63,5      | 73,0      | 86,5       | 101,0      | 55                   | 65                   |