
# K-T-RINGSTUECK

T-ring nipples

## Lastnosti

| | |
|---|---|
| **delovni tlak** | Max. 16 bar |
| **delovna temperatura** | -20 °C to +70°C |
| **Material:** | ponikljana medenina |
| **potisni obroč** | Hostaform |
| **vpenjalni obroč** | Stainless steel |



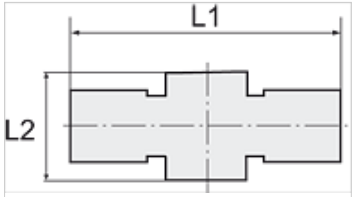


## Navodilo

Drugi podatki na zahtevo.

## Opis

The advanced version of our highly successful push-in fittings series manufactured in nickel-plated brass. Advantages of this new, optimised series: Much easier connection and disconnection of the hose, even with repeated mounting, can also be used for non-calibrated hoses, suitable for vacuum operation.

## Artikel

| Opis | za votel vijak | za zunanji Ø mm cevi | L1 (mm) | L2 (mm) |
|---|---|---|---|---|
| **K- 07 40 26 93** | M 5 | 4 mm | 36,0 | 9,0 |
| **K- 07 40 26 97** | G 1/8 | 4 mm | 42,0 | 15,0 |
| **K- 07 40 26 98** | G 1/8 | 6 mm | 46,0 | 15,0 |
| **K- 07 40 26 99** | G 1/8 | 8 mm | 49,0 | 15,0 |
| **K- 07 40 26 95** | G 1/4 | 6 mm | 48,0 | 17,0 |
| **K- 07 40 26 96** | G 1/4 | 8 mm | 52,0 | 17,0 |
| **K- 07 40 26 94** | G 1/4 | 10 mm | 52,0 | 17,0 |
| **K- 07 40 27 02** | G 3/8 | 8 mm | 54,0 | 20,0 |
| **K- 07 40 27 00** | G 3/8 | 10 mm | 56,0 | 20,0 |
| **K- 07 40 27 01** | G 3/8 | 12 mm | 58,0 | 20,0 |

*Kljub skrbnemu preverjanju napak ne moremo izključiti in za informacije, ki so tu navedene, ne prevzemamo nobene odgovornosti.*