


HK SAH

valj z votlim batom AI 700 bar

HANSA FLEX

Lastnosti

| | |
|-------------------------|---|
| Izvedba | glava valja, kaljena bat, trdo kromani povratna vzmet |
| Obratovalni tlak | maks. 700 bar |
| Material: | aluminij |
| Zaščita površine | eloksirano |
| Obseg dobave | s hitro spojko, puša 3/8"-18 NPT |

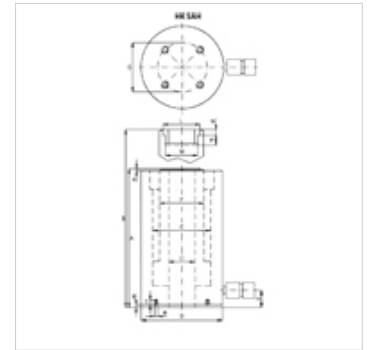

Navodilo

Attention: Please observe separate safety precautions for working with 700 bar equipment (see technical information)!

Opis

Valji z votlim batom so uporabljeni za tlačne in vlečne pomike.

Very low weight (-40% of a comparable steel cylinder)

Enostavna pritrditev z navojem na ohišju valja

batni obročki preprečujejo onesnaženje

zamenljiva naležna glava

Ni primerno za dolgotrajno uporabo z veliko frekvenco ponavljanja.

Artikel

| Opis | Hod | | Površina (cm ²) | A (mm) | B (mm) | C (mm) | D (mm) | E (mm) | F (mm) | H (mm) | K (mm) | L (mm) | M | N (mm) | R | S (mm) | T (mm) | Prostornina (cc) | Teža (kg) | |
|--------------|-------|-----|--------------------------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|----|-------------|----|-----------|-----------|---------------------|--------------|------|
| | (kN) | (t) | | | | | | | | | | | | | | | | | | |
| HK SAH 03015 | 301,8 | 30 | 150 | 44,0 | 352 | 502 | 33,0 | 130 | 90 | 68 | 32 | 4,0 | 55 | 1.11/13"-16 | 9 | M6 | 110,0 | 19 | 660 | 11,5 |
| HK SAH 06010 | 578,0 | 60 | 100 | 84,0 | 298 | 398 | 56,0 | 175 | 125 | 95 | 37 | 4,0 | 80 | 2.3/4"-16 | 12 | M6 | 155,0 | 19 | 842 | 19,5 |