


# T VA

## Navojni spoj, T oblik

### Osobine

|                             |   |
|-----------------------------|---|
| <b>Priključak 1 - 3</b>     | metrički spoljni cilindrični navoj                |
| <b>Oblik zaptivke 1 - 3</b> | 24° unutrašnji konus                              |
| <b>Konstrukcija</b>         | Navojni spoj                                      |
| <b>Konstrukcija</b>         | T oblik   |
| <b>Norma</b>                | DIN 2353<br>ISO 8434-1                            |
| <b>Obim isporuke</b>        | Nastavak sa preklopnom navrtkom i reznim prstenom |
| <b>Materijal</b>            | plemeniti čelik                                   |

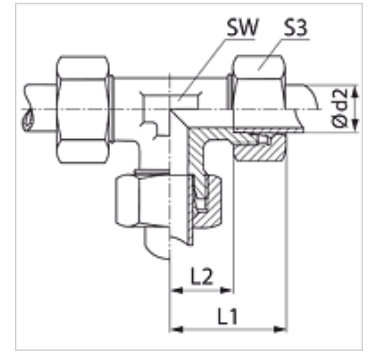

### Artikal

| Naziv         | Seriya | Radni pritisak bar | Ø d2 (mm) | L1 (mm) | L2 (mm) | SW (mm) | S3 |
|---------------|--------|--------------------|-----------|---------|---------|---------|----|
| T 04 LL VA    | LL     | PN 100             | 4         | 21      | 11,0    | 9       | 10 |
| T 06 LL VA    | LL     | PN 100             | 6         | 21      | 9,5     | 9       | 12 |
| T 08 LL VA    | LL     | PN 100             | 8         | 23      | 11,5    | 12      | 14 |
| T NW 04 HL VA | L      | PN 315             | 6         | 27      | 12,0    | 12      | 14 |
| T NW 06 HL VA | L      | PN 315             | 8         | 29      | 14,0    | 12      | 17 |
| T NW 08 HL VA | L      | PN 315             | 10        | 30      | 15,0    | 14      | 19 |
| T NW 10 HL VA | L      | PN 315             | 12        | 32      | 17,0    | 17      | 22 |
| T NW 13 HL VA | L      | PN 315             | 15        | 36      | 21,0    | 19      | 27 |
| T NW 16 HL VA | L      | PN 315             | 18        | 40      | 23,5    | 24      | 32 |
| T NW 20 HL VA | L      | PN 160             | 22        | 44      | 27,5    | 27      | 36 |
| T NW 25 HL VA | L      | PN 160             | 28        | 47      | 30,5    | 36      | 41 |
| T NW 32 HL VA | L      | PN 160             | 35        | 56      | 34,5    | 41      | 50 |
| T NW 40 HL VA | L      | PN 160             | 42        | 63      | 40,0    | 50      | 60 |
| T NW 03 HS VA | S      | PN 630             | 6         | 31      | 16,0    | 12      | 17 |
| T NW 04 HS VA | S      | PN 630             | 8         | 32      | 17,0    | 14      | 19 |
| T NW 06 HS VA | S      | PN 630             | 10        | 34      | 17,5    | 17      | 22 |
| T NW 08 HS VA | S      | PN 630             | 12        | 38      | 21,5    | 17      | 24 |
| T NW 10 HS VA | S      | PN 630             | 14        | 40      | 22,0    | 19      | 27 |
| T NW 13 HS VA | S      | PN 400             | 16        | 43      | 24,5    | 24      | 30 |
| T NW 16 HS VA | S      | PN 400             | 20        | 48      | 26,5    | 27      | 36 |
| T NW 20 HS VA | S      | PN 400             | 25        | 54      | 30,0    | 36      | 46 |
| T NW 25 HS VA | S      | PN 400             | 30        | 62      | 35,5    | 41      | 50 |
| T NW 32 HS VA | S      | PN 315             | 38        | 72      | 41,0    | 50      | 60 |

Seriya: LL = veoma lako L = lako S = teško - PN = nominalni pritisak PB = maks. radni pritisak - Ø d2 = spoljni prečnik cevi

### Varijante proizvoda

|              |  |
|--------------|--|
| <b>T</b>     | Navojni spoj, T oblik, čelik           |
| <b>T MG</b>  | Navojni spoj, T oblik, Mesing          |
| <b>XT VA</b> | Navojni spoj, T oblik, plemeniti čelik |