


Osobine

| | |
|-----------------------------|---|
| Priključak 1 | BSP spoljni cilindrični navoj |
| Oblik zaptivke 1 | Prsten sa zaptivnim rubom |
| Priključak 2 + 3 | metrički spoljni cilindrični navoj |
| Oblik zaptivke 2 + 3 | 24° unutrašnji konus |
| Konstrukcija | Zglobni navojni spoj, bez prigušivanja |
| Konstrukcija | T oblik |
| Norma | ISO 8434-1 |
| Obim isporuke | Nastavak (bez preklopne navrtke i reznog prstena) |
| Materijal | čelik |
| Površinska zaštita | galvanska prevlaka |

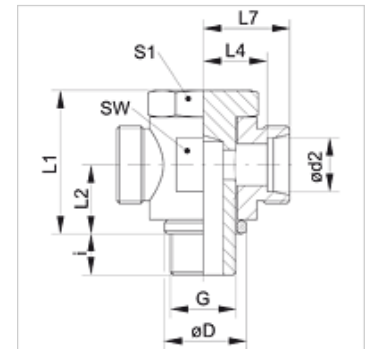

Napomena

Molimo Vas da napomene za montažu, ugradnju, opterećenje pod pritiskom i dozvoljene radne temperature nađete u tehničkim informacijama o navojnim spojevima za cevi.

Artikal

| Naziv | Seriya | Radni pritisak bar | Ø d2 (mm) | G | Ø D (mm) | i (mm) | L1 (mm) | L2 (mm) | L4 (mm) | L7 (mm) | SW (mm) | S1 |
|---------------|--------|--------------------|-----------|--------------|----------|--------|---------|---------|---------|---------|---------|----|
| XSTR NW 04 HL | L | PN 250 | 6 | G 1/8" -28 | 14 | 8 | 24 | 10,5 | 12,0 | 19,0 | 17 | 17 |
| XSTR NW 06 HL | L | PN 250 | 8 | G 1/4" -19 | 18 | 12 | 30 | 14,0 | 14,5 | 21,5 | 22 | 19 |
| XSTR NW 08 HL | L | PN 250 | 10 | G 1/4" -19 | 18 | 12 | 30 | 14,0 | 15,5 | 22,5 | 22 | 19 |
| XSTR NW 10 HL | L | PN 250 | 12 | G 3/8" -19 | 22 | 12 | 36 | 16,5 | 18,0 | 25,0 | 27 | 24 |
| XSTR NW 13 HL | L | PN 250 | 15 | G 1/2" -14 | 26 | 14 | 45 | 21,5 | 21,5 | 28,5 | 32 | 30 |
| XSTR NW 16 HL | L | PN 250 | 18 | G 1/2" -14 | 26 | 14 | 45 | 21,5 | 21,0 | 28,5 | 32 | 30 |
| XSTR NW 20 HL | L | PN 160 | 22 | G 3/4" -14 | 32 | 16 | 53 | 24,0 | 27,5 | 35,0 | 41 | 36 |
| XSTR NW 25 HL | L | PN 160 | 28 | G 1" -11 | 39 | 18 | 66 | 30,5 | 32,0 | 39,5 | 50 | 46 |
| XSTR NW 32 HL | L | PN 160 | 35 | G 1.1/4" -11 | 49 | 20 | 76 | 35,5 | 36,0 | 46,5 | 60 | 55 |
| XSTR NW 40 HL | L | PN 160 | 42 | G 1.1/2" -11 | 55 | 22 | 87 | 40,5 | 40,5 | 51,5 | 70 | 60 |
| XSTR NW 03 HS | S | PN 315 | 6 | G 1/4" -19 | 18 | 12 | 30 | 14,0 | 16,5 | 23,5 | 22 | 19 |
| XSTR NW 04 HS | S | PN 315 | 8 | G 1/4" -19 | 18 | 12 | 30 | 14,0 | 16,5 | 23,5 | 22 | 19 |
| XSTR NW 06 HS | S | PN 315 | 10 | G 3/8" -19 | 22 | 12 | 36 | 16,5 | 18,5 | 26,0 | 27 | 24 |
| XSTR NW 08 HS | S | PN 315 | 12 | G 3/8" -19 | 22 | 12 | 36 | 16,5 | 18,5 | 26,0 | 27 | 24 |
| XSTR NW 10 HS | S | PN 315 | 14 | G 1/2" -14 | 26 | 14 | 45 | 21,5 | 22,5 | 30,5 | 32 | 30 |
| XSTR NW 13 HS | S | PN 315 | 16 | G 1/2" -14 | 26 | 14 | 45 | 21,5 | 22,0 | 30,5 | 32 | 30 |
| XSTR NW 16 HS | S | PN 160 | 20 | G 3/4" -14 | 32 | 16 | 53 | 24,0 | 26,5 | 37,0 | 41 | 36 |
| XSTR NW 20 HS | S | PN 160 | 25 | G 1" -11 | 39 | 18 | 66 | 30,5 | 31,5 | 43,5 | 50 | 46 |
| XSTR NW 25 HS | S | PN 160 | 30 | G 1.1/4" -11 | 49 | 20 | 76 | 35,5 | 37,0 | 50,5 | 60 | 55 |
| XSTR NW 32 HS | S | PN 160 | 38 | G 1.1/2" -11 | 55 | 22 | 87 | 40,5 | 41,5 | 57,5 | 70 | 60 |

Seriya: LL = veoma lako L = lako S = teško - PN = nominalni pritisak PB = maks. radni pritisak - Ø d2 = spoljni prečnik cevi

Varijante proizvoda

STR Zglobni navojni spoj, bez prigušivanja, T oblik, Nastavak sa preklopnom navrtkom i reznim prstenom