


### Osobine

|                             |   |
|-----------------------------|---|
| <b>Priključak 1 + 2</b>     | metrički spoljni cilindrični navoj                |
| <b>Oblik zaptivke 1 + 2</b> | 24° unutrašnji konus                              |
| <b>Konstrukcija</b>         | Pregradni navojni spoj                            |
| <b>Konstrukcija</b>         | pravo   |
| <b>Norma</b>                | DIN 2353<br>ISO 8434-1                            |
| <b>Obim isporuke</b>        | Nastavak (bez preklapne navrtke i reznog prstena) |
| <b>Materijal</b>            | čelik   |
| <b>Površinska zaštita</b>   | galvanska prevlaka                                |

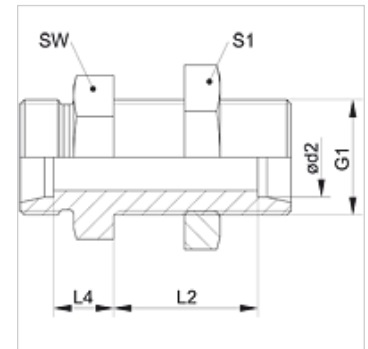

### Napomena

Molimo Vas da napomene za montažu, ugradnju, opterećenje pod pritiskom i dozvoljene radne temperature nađete u tehničkim informacijama o navojnim spojevima za cevi.

### Artikal

| Naziv        | Seriya | Radni pritisak bar | Ø d2 (mm) | G1         | L2 (mm) | L4 (mm) | SW (mm) | S1 |
|--------------|--------|--------------------|-----------|------------|---------|---------|---------|----|
| XSV NW 04 HL | L      | PN 315             | 6         | M 12 x 1,5 | 27,0    | 7,0     | 17      | 17 |
| XSV NW 06 HL | L      | PN 315             | 8         | M 14 x 1,5 | 27,0    | 8,0     | 19      | 19 |
| XSV NW 08 HL | L      | PN 315             | 10        | M 16 x 1,5 | 28,0    | 10,0    | 22      | 22 |
| XSV NW 10 HL | L      | PN 315             | 12        | M 18 x 1,5 | 29,0    | 10,0    | 24      | 24 |
| XSV NW 13 HL | L      | PN 315             | 15        | M 22 x 1,5 | 31,0    | 12,0    | 27      | 30 |
| XSV NW 16 HL | L      | PN 315             | 18        | M 26 x 1,5 | 32,5    | 13,5    | 32      | 36 |
| XSV NW 20 HL | L      | PN 160             | 22        | M 30 x 2   | 34,5    | 16,5    | 36      | 41 |
| XSV NW 25 HL | L      | PN 160             | 28        | M 36 x 2   | 35,5    | 18,5    | 41      | 46 |
| XSV NW 32 HL | L      | PN 160             | 35        | M 45 x 2   | 36,5    | 18,5    | 50      | 55 |
| XSV NW 40 HL | L      | PN 160             | 42        | M 52 x 2   | 36,0    | 19,0    | 60      | 65 |
| XSV NW 03 HS | S      | PN 630             | 6         | M 14 x 1,5 | 29,0    | 12,0    | 19      | 19 |
| XSV NW 04 HS | S      | PN 630             | 8         | M 16 x 1,5 | 29,0    | 13,0    | 22      | 22 |
| XSV NW 06 HS | S      | PN 630             | 10        | M 18 x 1,5 | 29,5    | 14,5    | 24      | 24 |
| XSV NW 08 HS | S      | PN 630             | 12        | M 20 x 1,5 | 30,5    | 14,5    | 27      | 27 |
| XSV NW 10 HS | S      | PN 630             | 14        | M 22 x 1,5 | 32,0    | 17,0    | 30      | 30 |
| XSV NW 13 HS | S      | PN 400             | 16        | M 24 x 1,5 | 31,5    | 16,5    | 32      | 32 |
| XSV NW 16 HS | S      | PN 400             | 20        | M 30 x 2   | 33,5    | 17,5    | 41      | 41 |
| XSV NW 20 HS | S      | PN 400             | 25        | M 36 x 2   | 35,0    | 20,0    | 46      | 46 |
| XSV NW 25 HS | S      | PN 400             | 30        | M 42 x 2   | 37,5    | 21,5    | 50      | 50 |
| XSV NW 32 HS | S      | PN 315             | 38        | M 52 x 2   | 37,0    | 22,0    | 65      | 65 |

Seriya: LL = veoma lako L = lako S = teško - PN = nominalni pritisak PB = maks. radni pritisak - Ø d2 = spoljni prečnik cevi

### Varijante proizvoda

|               |   |
|---------------|---|
| <b>XSV VA</b> | Pregradni navojni spoj, plemeniti čelik |
| <b>SV</b>     | Pregradni navojni spoj, čelik           |