


DRV IR

Protivpovratni ventil sa regulatorom DRV IR

HANSA FLEX

Osobine

Materijal	čelik
Mediji	mineralno ulje
Radni pritisak	maks. 315 bara

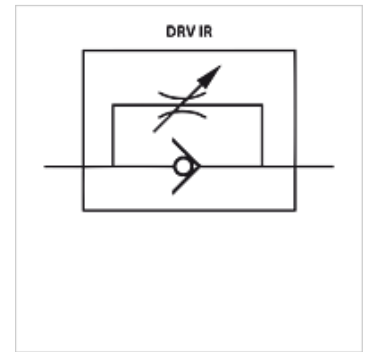

Napomena

Ovi ventili se moraju podesiti za primenu

Artikal

Naziv	G1	Q max. (L/min)	A (mm)	B (mm)	C (mm)	D (mm)	Težina (kg)
DRV 06 IR	G 1/4" -19	20	65	12	19	32	0,28
DRV 10 IR	G 3/8" -19	38	75	12	24	41	0,51
DRV 13 IR	G 1/2" -14	55	80	14	27	46	0,68
DRV 20 IR	G 3/4" -14	150	100	16	32	55	1,18
DRV 25 IR	G 1" -11	200	110	18	41	70	2,18

Qmax - maks. volumen protoka