


# AFS ST U (3000 / 6000 PSI)

SAE-prirubnica za navarivanje, colovana

**HANSA FLEX**

## Osobine

|                    |   |
|--------------------|---|
| Norma              | SAE J 518 C<br>ISO 6162                   |
| Konstrukcija       | pravo                                     |
| Konstrukcija       | SAE prirubnica za navarivanje, colovana   |
| Pričvršćivanje     | Otvor za zavrtanj                         |
| Obim isporuke      | sa UNC kompletom zavrtnejeva i O-prstenom |
| Materijal          | S355J2G3 (ST52.3)                         |
| Površinska zaštita | crno nauljen                              |

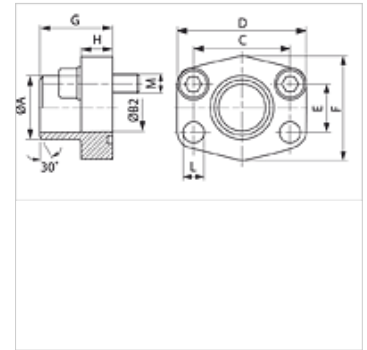

## Napomena

Navedeni maksimalni radni pritisak odnosi se na prirubnicu! Stvarni radni pritisak se određuje na osnovu cevi (debljina zida) kao i kvaliteta cevi!

## Artikal

| Naziv            | red pritiska | PB 10.9 | Konstrukciona veličina | A     | Ø B  | C     | D    | E    | F    | G    | H    | L    | M col          |
|------------------|--------------|---------|------------------------|-------|------|-------|------|------|------|------|------|------|----------------|
|                  |              | (bar)   |                        | (mm)  | (mm) | (mm)  | (mm) | (mm) | (mm) | (mm) | (mm) | (mm) |                |
| AFS 80 ST U      | 3000 PSI     | 350     | 1/2"                   | 21,6  | 13   | 38,1  | 54   | 17,5 | 46   | 36   | 16   | 9,0  | 5/16" x 1.1/4" |
| AFS 80 ST 038 U  | 3000 PSI     | 350     | 1/2"                   | 17,5  | 13   | 38,1  | 54   | 17,5 | 46   | 36   | 16   | 9,0  | 5/16" x 1.1/4" |
| AFS 100 ST U     | 3000 PSI     | 350     | 3/4"                   | 28,0  | 19   | 47,6  | 65   | 22,2 | 50   | 36   | 18   | 11,0 | 3/8" x 1.1/2"  |
| AFS 102 ST U     | 3000 PSI     | 315     | 1"                     | 34,0  | 25   | 52,4  | 70   | 26,2 | 55   | 38   | 18   | 11,0 | 3/8" x 1.1/2"  |
| AFS 104 ST U     | 3000 PSI     | 250     | 1.1/4"                 | 42,8  | 32   | 58,7  | 79   | 30,2 | 68   | 41   | 21   | 11,5 | 7/16" x 1.1/2" |
| AFS 106 ST U     | 3000 PSI     | 200     | 1.1/2"                 | 48,6  | 38   | 69,9  | 93   | 35,7 | 78   | 44   | 25   | 13,5 | 1/2" x 1.3/4"  |
| AFS 108 ST U     | 3000 PSI     | 200     | 2"                     | 61,0  | 51   | 77,8  | 102  | 42,9 | 90   | 45   | 25   | 13,5 | 1/2" x 1.3/4"  |
| AFS 110 ST U     | 3000 PSI     | 160     | 2.1/2"                 | 77,0  | 63   | 88,9  | 114  | 50,8 | 105  | 50   | 25   | 13,5 | 1/2" x 1.3/4"  |
| AFS 112 ST U     | 3000 PSI     | 138     | 3"                     | 92,0  | 73   | 106,4 | 134  | 61,9 | 124  | 50   | 27   | 17,5 | 5/8" x 2"      |
| AFS 114 ST U     | 3000 PSI     | 35      | 3.1/2"                 | 103,0 | 89   | 120,7 | 152  | 69,9 | 136  | 48   | 27   | 17,5 | 5/8" x 2"      |
| AFS 116 ST U     | 3000 PSI     | 35      | 4"                     | 115,1 | 99   | 130,2 | 162  | 77,8 | 146  | 48   | 27   | 17,5 | 5/8" x 2"      |
| AFS 401 ST 012 U | 6000 PSI     | 400     | 1/2"                   | 21,5  | 13   | 40,5  | 54   | 18,2 | 46   | 36   | 16   | 9,0  | 5/16" x 1.1/4" |
| AFS 401 ST 038 U | 6000 PSI     | 400     | 1/2"                   | 17,5  | 13   | 40,5  | 54   | 18,2 | 46   | 36   | 16   | 9,0  | 5/16" x 1.1/4" |
| AFS 402 ST U     | 6000 PSI     | 400     | 3/4"                   | 28,0  | 19   | 50,8  | 71   | 23,8 | 55   | 35   | 21   | 11,0 | 3/8" x 1.1/2"  |
| AFS 403 ST U     | 6000 PSI     | 400     | 1"                     | 34,0  | 25   | 57,2  | 79   | 27,8 | 68   | 41   | 21   | 13,0 | 7/16" x 1.3/4" |
| AFS 404 ST U     | 6000 PSI     | 375     | 1.1/4"                 | 42,8  | 32   | 66,7  | 93   | 31,8 | 78   | 44   | 25   | 15,0 | 1/2" x 1.3/4"  |
| AFS 405 ST U     | 6000 PSI     | 250     | 1.1/2"                 | 48,6  | 38   | 79,4  | 112  | 36,5 | 94   | 55   | 30   | 17,0 | 5/8" x 2"      |
| AFS 406 ST U     | 6000 PSI     | 250     | 2"                     | 61,0  | 51   | 96,8  | 134  | 44,5 | 114  | 65   | 37   | 21,0 | 3/4" x 2.1/2"  |

PN = nominalni pritisak PB = maks. radni pritisak

## Varijante proizvoda

|                            |  |
|----------------------------|--|
| AFS ST (3000 PSI)          | SAE-prirubnica za navarivanje, colovana, samo prirubnica                                 |
| AFS ST M (3000 / 6000 PSI) | SAE-prirubnica za navarivanje, colovana, sa metričkim kompletom zavrtnejeva i O-prstenom |