

# SAE O-RING

SAE O-prsten


**HANSA FLEX**

## Osobine

Konstrukcija SAE O-prsten

Norma SAE J518

Materijal NBR SH 90

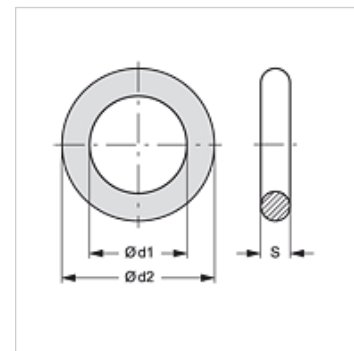

## Artikal

| Naziv            | Ø d1<br>(mm) | Ø d2<br>(mm) | S<br>(mm) |
|------------------|--------------|--------------|-----------|
| SAE O-RING 1/2   | 18,66        | 25,72        | 3,53      |
| SAE O-RING 3/4   | 25,00        | 32,06        | 3,53      |
| SAE O-RING 1     | 32,92        | 39,98        | 3,53      |
| SAE O-RING 1 1/4 | 37,70        | 44,76        | 3,53      |
| SAE O-RING 1 1/2 | 47,22        | 54,28        | 3,53      |
| SAE O-RING 2     | 56,75        | 63,81        | 3,53      |
| SAE O-RING 2 1/2 | 69,45        | 76,51        | 3,53      |
| SAE O-RING 3     | 85,32        | 92,38        | 3,53      |
| SAE O-RING 3 1/2 | 98,02        | 105,08       | 3,53      |
| SAE O-RING 4     | 110,72       | 117,78       | 3,53      |

## Varijante proizvoda

SAE O-RING V SAE-O-prsten FKM, FKM SH 90 ( viton )