


### Osobine

|                    |                                    |
|--------------------|------------------------------------|
| Priključak 1       | metrički navoj navrtke             |
| Oblik zaptivke 1   | 24° spoljašnji konus sa O-prstenom |
| Konstrukcija       | Navrtka za zatvaranje              |
| Konstrukcija       | pravo                              |
| Norma              | DIN 2353<br>ISO 8434-1             |
| Materijal          | čelik                              |
| Površinska zaštita | galvanska prevlaka                 |

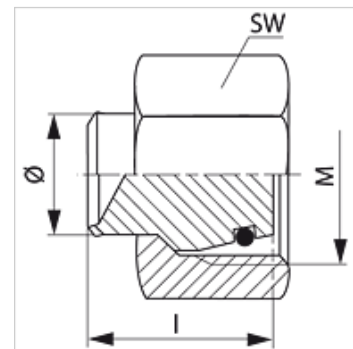

### Napomena

Molimo Vas da napomene za montažu, ugradnju, opterećenje pod pritiskom i dozvoljene radne temperature nađete u tehničkim informacijama o navojnim spojevima za cevi.

### Artikal

| Naziv     | Seriya | Radni pritisak bar | Cev spolja Ø (mm) | M          | I (mm) | SW (mm) | OR         |
|-----------|--------|--------------------|-------------------|------------|--------|---------|------------|
| VLM NW 04 | L      | PN 400             | 6                 | M 12 x 1,5 | 18,5   | 14      | 4,0 x 1,5  |
| VLM NW 06 | L      | PN 400             | 8                 | M 14 x 1,5 | 18,0   | 17      | 6,0 x 1,5  |
| VLM NW 08 | L      | PN 400             | 10                | M 16 x 1,5 | 19,5   | 19      | 7,5 x 1,5  |
| VLM NW 10 | L      | PN 400             | 12                | M 18 x 1,5 | 19,0   | 22      | 9,0 x 1,5  |
| VLM NW 13 | L      | PN 400             | 15                | M 22 x 1,5 | 19,0   | 27      | 12,0 x 2,0 |
| VLM NW 16 | L      | PN 315             | 18                | M 26 x 1,5 | 22,0   | 32      | 15,0 x 2,0 |
| VLM NW 20 | L      | PN 315             | 22                | M 30 x 2   | 22,0   | 36      | 20,0 x 2,0 |
| VLM NW 25 | L      | PN 250             | 28                | M 36 x 2   | 23,5   | 41      | 26,0 x 2,0 |
| VLM NW 32 | L      | PN 250             | 35                | M 45 x 2   | 27,0   | 50      | 32,0 x 2,5 |
| VLM NW 40 | L      | PN 250             | 42                | M 52 x 2   | 27,5   | 60      | 38,0 x 2,5 |
| VSM NW 03 | S      | PN 630             | 6                 | M 14 x 1,5 | 18,5   | 17      | 4,0 x 1,5  |
| VSM NW 04 | S      | PN 630             | 8                 | M 16 x 1,5 | 18,0   | 19      | 6,0 x 1,5  |
| VSM NW 06 | S      | PN 630             | 10                | M 18 x 1,5 | 19,5   | 22      | 7,5 x 1,5  |
| VSM NW 08 | S      | PN 630             | 12                | M 20 x 1,5 | 19,0   | 24      | 9,0 x 1,5  |
| VSM NW 10 | S      | PN 630             | 14                | M 22 x 1,5 | 21,0   | 27      | 10,0 x 2,0 |
| VSM NW 13 | S      | PN 400             | 16                | M 24 x 1,5 | 22,0   | 30      | 12,0 x 2,0 |
| VSM NW 16 | S      | PN 400             | 20                | M 30 x 2   | 26,5   | 36      | 16,0 x 2,5 |
| VSM NW 20 | S      | PN 400             | 25                | M 36 x 2   | 27,5   | 46      | 20,0 x 2,5 |
| VSM NW 25 | S      | PN 400             | 30                | M 42 x 2   | 28,5   | 50      | 25,0 x 2,5 |
| VSM NW 32 | S      | PN 315             | 38                | M 52 x 2   | 32,5   | 60      | 33,0 x 2,5 |

PN = nominalni pritisak PB = maks. radni pritisak - Seriya: LL = veoma lako L = lako S = teško - Ø = spoljni prečnik cevi

### Varijante proizvoda

VLM VA / VSM VA Navrtka za zatvaranje, plemeniti čelik