


## Osobine

|                    |   |
|--------------------|---|
| Priključak 1       | BSP spoljni cilindrični navoj                     |
| Oblik zaptivke 1   | Prsten sa zaptivnim rubom                         |
| Priključak 2       | metrički spoljni cilindrični navoj                |
| Oblik zaptivke 2   | 24° unutrašnji konus                              |
| Konstrukcija       | Zglobni navojni spoj, bez prigušivanja            |
| Konstrukcija       | ugao 90°  |
| Norma              | DIN 2353<br>ISO 8434-1                            |
| Obim isporuke      | Nastavak sa preklopnom navrtkom i reznim prstenom |
| Materijal          | čelik   |
| Površinska zaštita | galvanska prevlaka                                |

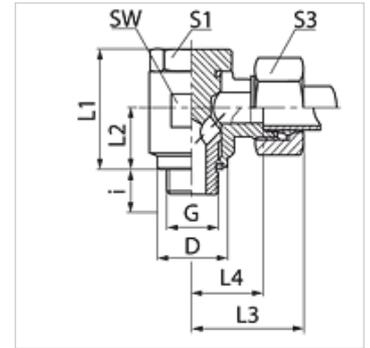

## Napomena

Molimo Vas da napomene za montažu, ugradnju, opterećenje pod pritiskom i dozvoljene radne temperature nađete u tehničkim informacijama o navojnim spojevima za cevi.

## Artikal

| Naziv            | Seriya | Radni pritisak bar | Cev spolja Ø (mm) | G            | D (mm) | i (mm) | L1 (mm) | L2 (mm) | L3 (mm) | L4 (mm) | SW (mm) | S1 | S3 |
|------------------|--------|--------------------|-------------------|--------------|--------|--------|---------|---------|---------|---------|---------|----|----|
| SDR NW 04 HL     | L      | PN 250             | 6                 | G 1/8" -28   | 14,0   | 8      | 24      | 10,5    | 27      | 12,0    | 17      | 17 | 14 |
| SDR NW 04 HL 1/4 | L      | PN 250             | 6                 | G 1/4" -19   | 18,0   | 12     | 30      | 14,0    | 29      | 14,5    | 22      | 19 | 14 |
| SDR NW 06 HL     | L      | PN 250             | 8                 | G 1/4" -19   | 18,0   | 12     | 30      | 14,0    | 29      | 14,5    | 22      | 19 | 17 |
| SDR NW 08 HL     | L      | PN 250             | 10                | G 1/4" -19   | 18,0   | 12     | 30      | 14,0    | 30      | 15,5    | 22      | 19 | 19 |
| SDR NW 10 HL 1/4 | L      | PN 250             | 12                | G 1/4" -19   | 22,0   | 12     | 30      | 14,0    | 30      | 15,5    | 22      | 19 | 22 |
| SDR NW 10 HL     | L      | PN 250             | 12                | G 3/8" -19   | 22,0   | 12     | 36      | 16,5    | 33      | 18,0    | 27      | 24 | 22 |
| SDR NW 10 HL 1/2 | L      | PN 250             | 12                | G 1/2" -14   | 26,0   | 14     | 45      | 21,5    | 35      | 20,5    | 32      | 30 | 22 |
| SDR NW 13 HL     | L      | PN 250             | 15                | G 1/2" -14   | 26,0   | 14     | 45      | 21,5    | 37      | 21,5    | 32      | 30 | 27 |
| SDR NW 16 HL     | L      | PN 250             | 18                | G 1/2" -14   | 26,0   | 14     | 45      | 21,5    | 37      | 21,0    | 32      | 30 | 32 |
| SDR NW 20 HL     | L      | PN 160             | 22                | G 3/4" -14   | 32,0   | 16     | 53      | 24,0    | 44      | 27,5    | 41      | 36 | 36 |
| SDR NW 25 HL     | L      | PN 160             | 28                | G 1" -11     | 39,0   | 18     | 66      | 30,5    | 49      | 32,0    | 50      | 46 | 41 |
| SDR NW 32 HL     | L      | PN 160             | 35                | G 1.1/4" -11 | 49,0   | 20     | 76      | 35,5    | 58      | 36,0    | 60      | 55 | 50 |
| SDR NW 40 HL     | L      | PN 160             | 42                | G 1.1/2" -11 | 55,0   | 22     | 87      | 40,5    | 63      | 40,5    | 70      | 60 | 60 |
| SDR NW 03 HS     | S      | PN 315             | 6                 | G 1/4" -19   | 18,0   | 12     | 30      | 14,0    | 31      | 16,5    | 22      | 19 | 17 |
| SDR NW 04 HS     | S      | PN 315             | 8                 | G 1/4" -19   | 18,0   | 12     | 30      | 14,0    | 31      | 16,5    | 22      | 19 | 19 |
| SDR NW 06 HS     | S      | PN 315             | 10                | G 3/8" -19   | 22,0   | 12     | 36      | 16,5    | 35      | 18,5    | 27      | 24 | 22 |
| SDR NW 08 HS     | S      | PN 315             | 12                | G 3/8" -19   | 22,0   | 12     | 36      | 16,5    | 35      | 18,5    | 27      | 24 | 24 |
| SDR NW 10 HS     | S      | PN 315             | 14                | G 1/2" -14   | 26,0   | 14     | 45      | 21,5    | 40      | 22,5    | 32      | 30 | 27 |
| SDR NW 13 HS     | S      | PN 315             | 16                | G 1/2" -14   | 26,5   | 14     | 45      | 21,5    | 40      | 22,0    | 32      | 30 | 30 |
| SDR NW 16 HS     | S      | PN 160             | 20                | G 3/4" -14   | 32,0   | 16     | 53      | 24,0    | 48      | 26,5    | 41      | 36 | 36 |
| SDR NW 20 HS     | S      | PN 160             | 25                | G 1" -11     | 39,0   | 18     | 66      | 30,5    | 56      | 31,5    | 50      | 46 | 46 |
| SDR NW 25 HS     | S      | PN 160             | 30                | G 1.1/4" -11 | 49,0   | 20     | 76      | 35,5    | 64      | 37,0    | 60      | 55 | 50 |
| SDR NW 32 HS     | S      | PN 160             | 38                | G 1.1/2" -11 | 55,0   | 22     | 87      | 40,5    | 72      | 41,5    | 70      | 60 | 60 |

PN = nominalni pritisak PB = maks. radni pritisak - Serija: LL = veoma lako L = lako S = teško - Ø = spoljni prečnik cevi

## Varijante proizvoda

## XSDR