


# XVEWO 45 VA

Navojni spoj, ugao 45°

**HANSA FLEX**

## Osobine

|                  |   |
|------------------|---|
| Priključak 1     | metrički navoj navrtke                            |
| Oblik zaptivke 1 | 24° spoljašnji konus sa O-prstenom                |
| Priključak 2     | metrički spoljni cilindrični navoj                |
| Oblik zaptivke 2 | 24° unutrašnji konus                              |
| Konstrukcija     | Navojni spoj podesiv po pravcima                  |
| Konstrukcija     | ugao 45°  |
| Obim isporuke    | Nastavak (bez preklopne navrtke i reznog prstena) |
| Materijal        | plemeniti čelik                                   |

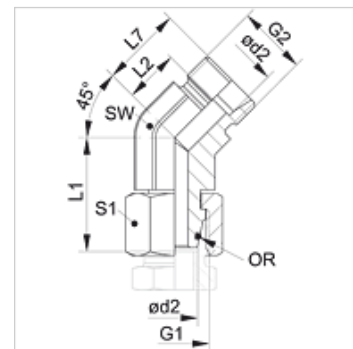

## Napomena

Molimo Vas da napomene za montažu, ugradnju, opterećenje pod pritiskom i dozvoljene radne temperature nađete u tehničkim informacijama o navojnim spojevima za cevi.

## Napomene u vezi porudžbine

NBR заптивке

ФПМ (витон) на захтев

## Artikal

| Naziv                | Seriya | Radni pritisak bar | Ø d2 (mm) | G1 + G2    | L1 (mm) | L2 (mm) | L7 (mm) | SW (mm) | S1 | OR         |
|----------------------|--------|--------------------|-----------|------------|---------|---------|---------|---------|----|------------|
| XVEWO 45 NW 04 HL VA | L      | PN 315             | 6         | M 12 x 1,5 | 26,0    | 9,0     | 16,0    | 14      | 14 | 4,0 x 1,5  |
| XVEWO 45 NW 06 HL VA | L      | PN 315             | 8         | M 14 x 1,5 | 27,5    | 12,0    | 27,5    | 14      | 17 | 6,0 x 1,5  |
| XVEWO 45 NW 08 HL VA | L      | PN 315             | 10        | M 16 x 1,5 | 29,0    | 12,0    | 19,0    | 19      | 19 | 7,5 x 1,5  |
| XVEWO 45 NW 10 HL VA | L      | PN 315             | 12        | M 18 x 1,5 | 29,5    | 14,0    | 21,0    | 19      | 22 | 9,0 x 1,5  |
| XVEWO 45 NW 13 HL VA | L      | PN 315             | 15        | M 22 x 1,5 | 32,5    | 17,0    | 24,0    | 22      | 27 | 12,0 x 2,0 |
| XVEWO 45 NW 16 HL VA | L      | PN 315             | 18        | M 26 x 1,5 | 35,5    | 16,5    | 24,0    | 27      | 32 | 15,0 x 2,0 |
| XVEWO 45 NW 20 HL VA | L      | PN 160             | 22        | M 30 x 2   | 38,5    | 18,5    | 26,0    | 30      | 36 | 20,0 x 2,0 |
| XVEWO 45 NW 25 HL VA | L      | PN 160             | 28        | M 36 x 2   | 41,5    | 23,0    | 30,5    | 36      | 41 | 26,0 x 2,0 |
| XVEWO 45 NW 32 HL VA | L      | PN 160             | 35        | M 45 x 2   | 51,0    | 26,5    | 37,0    | 50      | 50 | 32,0 x 2,5 |
| XVEWO 45 NW 40 HL VA | L      | PN 160             | 42        | M 52 x 2   | 56,0    | 26,0    | 37,0    | 50      | 60 | 38,0 x 2,5 |
| XVEWO 45 NW 03 HS VA | S      | PN 630             | 6         | M 14 x 1,5 | 27,0    | 9,0     | 16,0    | 14      | 17 | 4,0 x 1,5  |
| XVEWO 45 NW 04 HS VA | S      | PN 630             | 8         | M 16 x 1,5 | 27,5    | 12,0    | 19,0    | 19      | 19 | 6,0 x 1,5  |
| XVEWO 45 NW 06 HS VA | S      | PN 630             | 10        | M 18 x 1,5 | 30,0    | 13,5    | 21,0    | 19      | 22 | 7,5 x 1,5  |
| XVEWO 45 NW 08 HS VA | S      | PN 630             | 12        | M 20 x 1,5 | 31,0    | 16,5    | 24,0    | 19      | 24 | 9,0 x 1,5  |
| XVEWO 45 NW 13 HS VA | S      | PN 400             | 16        | M 24 x 1,5 | 36,5    | 15,5    | 24,0    | 19      | 30 | 12,0 x 2,0 |
| XVEWO 45 NW 16 HS VA | S      | PN 400             | 20        | M 30 x 2   | 44,5    | 16,0    | 26,5    | 27      | 36 | 16,3 x 2,4 |
| XVEWO 45 NW 20 HS VA | S      | PN 400             | 25        | M 36 x 2   | 50,0    | 18,5    | 30,5    | 36      | 46 | 20,3 x 2,4 |
| XVEWO 45 NW 25 HS VA | S      | PN 400             | 30        | M 42 x 2   | 55,0    | 23,5    | 37,0    | 50      | 50 | 25,3 x 2,4 |
| XVEWO 45 NW 32 HS VA | S      | PN 315             | 38        | M 52 x 2   | 63,0    | 21,0    | 37,0    | 50      | 60 | 33,3 x 2,4 |

Seriya: LL = veoma lako L = lako S = teško - PN = nominalni pritisak PB = maks. radni pritisak - Ø d2 = spoljni prečnik cevi

## Varijante proizvoda

|            |   |
|------------|---|
| XVEWO 45   | Navojni spoj, ugao 45°, čelik           |
| VEWO 45 VA | Navojni spoj, ugao 45°, plemeniti čelik |