


# XVEWO VA

## Navojni spoj, ugao 90°

### Osobine

<b>Priključak 1</b>	metrički navoj navrtke
<b>Oblik zaptivke 1</b>	24° spoljašnji konus sa O-prstenom
<b>Priključak 2</b>	metrički spoljni cilindrični navoj
<b>Oblik zaptivke 2</b>	24° unutrašnji konus
<b>Konstrukcija</b>	Navojni spoj podesiv po pravcima
<b>Konstrukcija</b>	ugao 90°
<b>Norma</b>	ISO 8434-1
<b>Obim isporuke</b>	Nastavak (bez preklopne navrtke i reznog prstena)
<b>Materijal</b>	plemeniti čelik

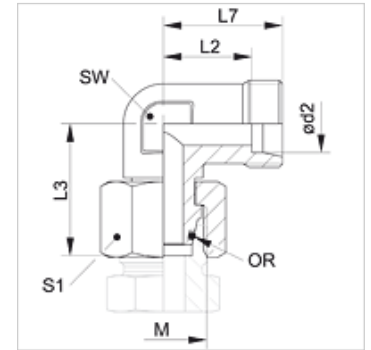

### Napomena

Molimo Vas da napomene za montažu, ugradnju, opterećenje pod pritiskom i dozvoljene radne temperature nađete u tehničkim informacijama o navojnim spojevima za cevi.

### Napomene u vezi porudžbine

NBR заптивке

ФГМ (витон) на захтев

### Artikal

Naziv	Seriya	Radni pritisak bar	Ø d2 (mm)	M	L2 (mm)	L3 (mm)	L7 (mm)	SW (mm)	S1	OR
XVEWO NW 04 HL VA	L	PN 315	6	M 12 x 1,5	12,0	26,0	19	12	14	4,0 x 1,5
XVEWO NW 06 HL VA	L	PN 315	8	M 14 x 1,5	14,0	27,5	21	12	17	6,0 x 1,5
XVEWO NW 08 HL VA	L	PN 315	10	M 16 x 1,5	15,0	29,0	22	14	19	7,5 x 1,5
XVEWO NW 10 HL VA	L	PN 315	12	M 18 x 1,5	17,0	29,5	24	17	22	9,0 x 1,5
XVEWO NW 13 HL VA	L	PN 315	15	M 22 x 1,5	21,0	32,5	28	19	27	12,0 x 2,0
XVEWO NW 16 HL VA	L	PN 315	18	M 26 x 1,5	23,5	35,5	31	24	32	15,0 x 2,0
XVEWO NW 20 HL VA	L	PN 160	22	M 30 x 2	27,5	38,5	35	27	36	20,0 x 2,0
XVEWO NW 25 HL VA	L	PN 160	28	M 36 x 2	30,5	41,5	38	36	41	26,0 x 2,0
XVEWO NW 32 HL VA	L	PN 160	35	M 45 x 2	34,5	51,0	45	41	50	32,0 x 2,5
XVEWO NW 40 HL VA	L	PN 160	42	M 52 x 2	40,0	56,0	51	50	60	38,0 x 2,5
XVEWO NW 03 HS VA	S	PN 630	6	M 14 x 1,5	16,0	27,0	23	12	17	4,0 x 1,5
XVEWO NW 04 HS VA	S	PN 630	8	M 16 x 1,5	17,0	27,5	24	14	19	6,0 x 1,5
XVEWO NW 06 HS VA	S	PN 630	10	M 18 x 1,5	17,5	30,0	25	17	22	7,5 x 1,5
XVEWO NW 08 HS VA	S	PN 630	12	M 20 x 1,5	21,5	31,0	29	17	24	9,0 x 1,5
XVEWO NW 10 HS VA	S	PN 630	14	M 22 x 1,5	22,0	35,0	30	19	27	10,0 x 2,0
XVEWO NW 13 HS VA	S	PN 400	16	M 24 x 1,5	24,5	36,5	33	24	30	12,0 x 2,0
XVEWO NW 16 HS VA	S	PN 400	20	M 30 x 2	26,5	44,5	37	27	36	16,3 x 2,4
XVEWO NW 20 HS VA	S	PN 400	25	M 36 x 2	30,0	50,0	42	36	46	20,3 x 2,4
XVEWO NW 25 HS VA	S	PN 400	30	M 42 x 2	35,5	55,0	49	41	50	25,3 x 2,4
XVEWO NW 32 HS VA	S	PN 315	38	M 52 x 2	41,0	63,0	57	50	60	33,3 x 2,4

Seriya: LL = veoma lako L = lako S = teško - PN = nominalni pritisak PB = maks. radni pritisak - Ø d2 = spoljni prečnik cevi

### Varijante proizvoda

<b>XVEWO</b>	Navojni spoj, ugao 90°, čelik
<b>VEWO VA</b>	Navojni spoj, ugao 90°, plemeniti čelik