


Osobine

| | |
|---------------------------|---|
| Priključak 1 | metrički spoljni konusni navoj |
| Oblik zaptivke 1 | zaptivanje preko navoja |
| Priključak 2 | metrički spoljni cilindrični navoj |
| Oblik zaptivke 2 | 24° unutrašnji konus |
| Konstrukcija | Uvrtni navojni spoj |
| Konstrukcija | ugao 90° |
| Norma | DIN 2353 ISO 8434-1 |
| Obim isporuke | Nastavak (bez preklopne navrtke i reznog prstena) |
| Materijal | čelik |
| Površinska zaštita | galvanska prevlaka |

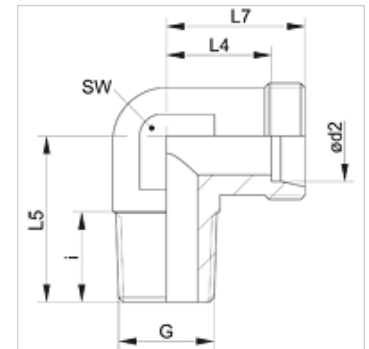

Napomena

Molimo Vas da napomene za montažu, ugradnju, opterećenje pod pritiskom i dozvoljene radne temperature nađete u tehničkim informacijama o navojnim spojevima za cevi.

Artikal

| Naziv | Seriya | Radni pritisak bar | Ø d2 (mm) | G | i (mm) | L4 (mm) | L5 (mm) | L7 (mm) | SW (mm) |
|-----------------|--------|--------------------|-----------|--------------|--------|---------|---------|---------|---------|
| XWM 04 LL | LL | PN 100 | 4 | M 8 x 1 K | 8,0 | 11,0 | 17 | 15 | 9 |
| XWM 04 LL 6 | LL | PN 100 | 4 | M 6 x 1 K | 8,0 | 11,0 | 17 | 15 | 9 |
| XWM 05 LL | LL | PN 100 | 5 | M 8 x 1 K | 8,0 | 9,5 | 17 | 15 | 9 |
| XWM 06 LL 6 | LL | PN 100 | 6 | M 6 x 1 K | 7,0 | 9,5 | 17 | 15 | 9 |
| XWM 06 LL 8 | LL | PN 100 | 6 | M 8 x 1 K | 8,0 | 9,5 | 17 | 15 | 9 |
| XWM 06 LL | LL | PN 100 | 6 | M 10 x 1 K | 9,0 | 9,5 | 17 | 15 | 9 |
| XWM 08 LL | LL | PN 100 | 8 | M 10 x 1 K | 10,0 | 11,5 | 20 | 17 | 12 |
| XWM NW 04 HL | L | PN 315 | 6 | M 10 x 1 K | 8,0 | 12,0 | 20 | 19 | 12 |
| XWM NW 04 HL 12 | L | PN 315 | 6 | M 12 x 1,5 K | 12,0 | 12,0 | 22 | 19 | 12 |
| XWM NW 06 HL | L | PN 315 | 8 | M 12 x 1,5 K | 12,0 | 14,0 | 26 | 21 | 12 |
| XWM NW 08 HL | L | PN 315 | 10 | M 14 x 1,5 K | 11,5 | 15,0 | 27 | 22 | 14 |
| XWM NW 08 HL 16 | L | PN 315 | 10 | M 16 x 1,5 K | 11,5 | 15,0 | 28 | 22 | 14 |
| XWM NW 10 HL | L | PN 315 | 12 | M 16 x 1,5 K | 11,5 | 17,0 | 28 | 24 | 17 |
| XWM NW 13 HL | L | PN 315 | 15 | M 18 x 1,5 K | 13,5 | 21,0 | 32 | 28 | 19 |
| XWM NW 16 HL | L | PN 315 | 18 | M 22 x 1,5 K | 15,0 | 23,5 | 36 | 31 | 24 |
| XWM NW 03 HS | S | PN 400 | 6 | M 12 x 1,5 K | 12,0 | 16,0 | 26 | 23 | 12 |
| XWM NW 04 HS | S | PN 400 | 8 | M 14 x 1,5 K | 12,0 | 17,0 | 27 | 24 | 14 |
| XWM NW 06 HS | S | PN 400 | 10 | M 16 x 1,5 K | 12,0 | 17,5 | 28 | 25 | 17 |
| XWM NW 08 HS | S | PN 400 | 12 | M 18 x 1,5 K | 12,0 | 21,5 | 28 | 29 | 17 |
| XWM NW 10 HS | S | PN 400 | 14 | M 20 x 1,5 K | 14,0 | 22,0 | 32 | 30 | 19 |
| XWM NW 13 HS | S | PN 400 | 16 | M 22 x 1,5 K | 14,0 | 24,5 | 32 | 33 | 24 |

Seriya: LL = veoma lako L = lako S = teško - PN = nominalni pritisak PB = maks. radni pritisak - Ø d2 = spoljni prečnik cevi

Varijante proizvoda

| | |
|----------------|--|
| XWMK VA | Uvrtni navojni spoj, ugao 90°, plemeniti čelik |
| WMK | Uvrtni navojni spoj, ugao 90°, čelik |