



# ND AOL

Utična spojnica, DKOL

**HANSA FLEX**

## Osobine

|                    |                                    |
|--------------------|------------------------------------|
| Priključak 1       | metrički navoj navrtke             |
| Oblik zaptivke 1   | 24° spoljašnji konus sa O-prstenom |
| Skraćenica         | DKOL                               |
| Norma              | ISO 8434-1                         |
| Materijal          | čelik                              |
| Površinska zaštita | galvanska prevlaka                 |

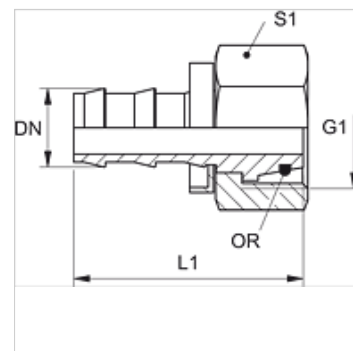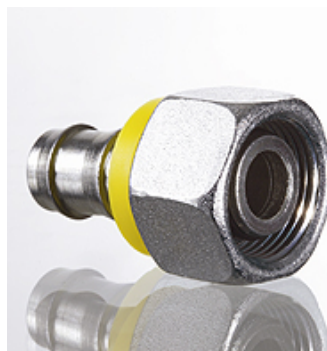

## Napomena

Neoštećene mazalice se mogu ponovo koristiti.

## Artikal

| Naziv        | DN | Veličina | col  | G1         | Ø za cev spolja (mm) | L1 (mm) | S1 | OR         |
|--------------|----|----------|------|------------|----------------------|---------|----|------------|
| ND 06 AOL 04 | 6  | 4        | 1/4" | M 12 x 1,5 | 6                    | 40,0    | 14 | 4,5 x 1,5  |
| ND 06 AOL    | 6  | 4        | 1/4" | M 14 x 1,5 | 8                    | 36,0    | 17 | 6,5 x 1,5  |
| ND 06 AOL 08 | 6  | 4        | 1/4" | M 16 x 1,5 | 10                   | 36,0    | 19 | 8,5 x 1,5  |
| ND 10 AOL 08 | 10 | 6        | 3/8" | M 16 x 1,5 | 10                   | 40,0    | 19 | 8,5 x 1,5  |
| ND 10 AOL    | 10 | 6        | 3/8" | M 18 x 1,5 | 12                   | 40,0    | 22 | 10,5 x 1,5 |
| ND 13 AOL    | 12 | 8        | 1/2" | M 22 x 1,5 | 15                   | 44,0    | 27 | 12,5 x 1,5 |
| ND 16 AOL    | 16 | 10       | 5/8" | M 26 x 1,5 | 18                   | 56,0    | 32 | 16,0 x 2,0 |
| ND 20 AOL    | 19 | 12       | 3/4" | M 30 x 2   | 22                   | 58,0    | 36 | 20,0 x 2,0 |

## Pribor

ND ASR GE, RO, BL Granični prsten za utičnu spojnicu