

# PA 500 AOS 90 A

Utična armatura, DKOS W90°

**HANSA FLEX**

## Osobine

**Oblast primene** Utična armatura za creva HD 500

**Priključak 1** metrički navoj navrtke

**Oblik zaptivke 1** 24° spoljašnji konus sa O-prstenom

**Skraćenica** DKOS


**Norma** ISO 8434-1

**Uvezivanje** sa osiguračem kidanja (interlock)

**Obim isporuke** Pritisna nazuvica + pritisni priključak

**Materijal** čelik

**Površinska zaštita** galvanska prevlaka

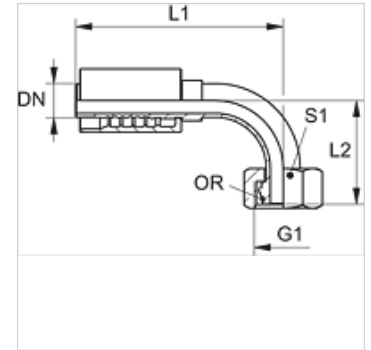

## Artikal

Naziv	DN	Veličina	col	G1	Ø za cev spolja (mm)	L1 (mm)	L2 (mm)	S1	OR
PA 720 AOS 16 90	19	12	3/4"	M 30 x 2	20	125,5	57,5	36	17,5 x 2,5
PA 720 AOS 90	19	12	3/4"	M 36 x 2	25	125,5	62,0	46	22,0 x 2,5
PA 720 AOS 25 90	19	12	3/4"	M 42 x 2	30	129,0	71,5	50	27,0 x 2,5
PA 725 AOS 20 90	25	16	1"	M 36 x 2	25	144,0	71,0	46	22,0 x 2,5
PA 725 AOS 90	25	16	1"	M 42 x 2	30	157,5	72,5	50	27,0 x 2,5
PA 725 AOS 32 90	25	16	1"	M 52 x 2	38	154,5	84,5	60	33,0 x 2,5
PA 532 AOS 25 90 A	31	20	1.1/4"	M 42 x 2	30	162,0	82,0	50	27,0 x 2,5
PA 532 AOS 90 A	31	20	1.1/4"	M 52 x 2	38	182,0	91,0	60	33,0 x 2,5

## Varijante proizvoda

PA 500 AOS 90 VA Utična armatura, DKOS W90°, plemeniti čelik