


# PA 500 SF9 90 A

Utična armatura, SFS-CAT W90°

**HANSA FLEX**

## Osobine

|                           |   |
|---------------------------|---|
| <b>Oblast primene</b>     | Utična armatura za creva HD 500         |
| <b>Priključak 1</b>       | SAE priključak prirubnice 6000 PSI      |
| <b>Oblik zaptivke 1</b>   | ravno zaptivanje sa SF O-prstenom       |
| <b>Skraćenica</b>         | SFS-CAT                                 |
| <b>Podesno za</b>         | Caterpillar                             |
| <b>Uvezivanje</b>         | sa osiguračem kidanja (interlock)       |
| <b>Obim isporuke</b>      | Pritisna nazuvica + pritisni priključak |
| <b>Materijal</b>          | čelik                                   |
| <b>Površinska zaštita</b> | galvanska prevlaka                      |

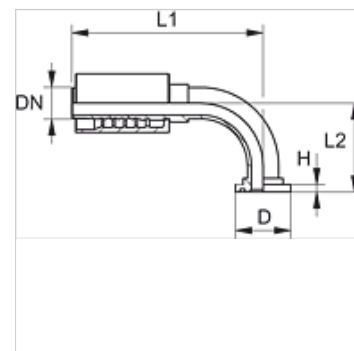

## Artikal

| Naziv              | DN | Veličina | col    | Veličina spojnice | D<br>(mm) | H<br>(mm) | L1<br>(mm) | L2<br>(mm) |
|--------------------|----|----------|--------|-------------------|-----------|-----------|------------|------------|
| PA 720 SF9 90      | 19 | 12       | 3/4"   | 3/4"              | 41,3      | 14,2      | 127,5      | 67,5       |
| PA 720 SF9 25 90   | 19 | 12       | 3/4"   | 1"                | 47,6      | 14,2      | 127,5      | 72,5       |
| PA 725 SF9 20 90   | 25 | 16       | 1"     | 3/4"              | 41,3      | 14,2      | 144,0      | 83,5       |
| PA 725 SF9 90      | 25 | 16       | 1"     | 1"                | 47,6      | 14,2      | 158,0      | 78,5       |
| PA 725 SF9 32 90   | 25 | 16       | 1"     | 1.1/4"            | 54,0      | 14,2      | 158,0      | 85,0       |
| PA 532 SF9 25 90 A | 31 | 20       | 1.1/4" | 1"                | 47,6      | 14,0      | 161,0      | 82,0       |
| PA 532 SF9 90 A    | 31 | 20       | 1.1/4" | 1.1/4"            | 54,0      | 14,0      | 182,0      | 97,0       |
| PA 532 SF9 40 90 A | 31 | 20       | 1.1/4" | 1.1/2"            | 63,5      | 14,0      | 182,0      | 103,0      |
| PA 540 SF9 32 90 A | 38 | 24       | 1.1/2" | 1.1/4"            | 54,0      | 14,0      | 192,0      | 100,0      |
| PA 540 SF9 90 A    | 38 | 24       | 1.1/2" | 1.1/2"            | 63,5      | 14,0      | 215,5      | 112,0      |