

PA 700 SF9 45

Utična armatura, SFS-CAT W45°

HANSA FLEX

Osobine

Oblast primene Utična armatura za creva HD 700

Priključak 1 SAE priključak priрубnice 6000 PSI

Oblik zaptivke 1 ravno zaptivanje sa SF O-prstenom

Skraćenica SFS-CAT


Podesno za Caterpillar

Uvezivanje sa osiguračem kidanja (interlock)

Obim isporuke Pritisna nazuvica + pritisni priključak

Materijal čelik

Površinska zaštita galvanska prevlaka

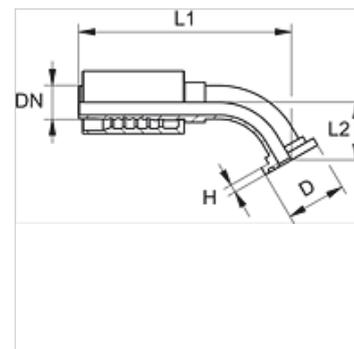

Artikal

| Naziv | DN | Veličina | col | Veličina spojnice | Radni pritisak (bar) | D (mm) | H (mm) | L1 (mm) | L2 (mm) |
|--------------------|----|----------|--------|-------------------|----------------------|--------|--------|---------|---------|
| PA 720 SF9 45 | 19 | 12 | 3/4" | 3/4" | 420,0 | 41,3 | 14,2 | 139,0 | 34,0 |
| PA 720 SF9 25 45 | 19 | 12 | 3/4" | 1" | 420,0 | 47,6 | 14,2 | 143,0 | 37,5 |
| PA 725 SF9 20 45 | 25 | 16 | 1" | 3/4" | 420,0 | 41,3 | 14,2 | 157,0 | 35,0 |
| PA 725 SF9 45 | 25 | 16 | 1" | 1" | 420,0 | 47,6 | 14,2 | 167,0 | 36,5 |
| PA 725 SF9 32 45 | 25 | 16 | 1" | 1.1/4" | 420,0 | 54,0 | 14,2 | 172,0 | 41,5 |
| PA 732 SF9 25 45 S | 31 | 20 | 1.1/4" | 1" | 420,0 | 47,6 | 14,0 | 174,0 | 39,5 |
| PA 732 SF9 45 S | 31 | 20 | 1.1/4" | 1.1/4" | 420,0 | 54,0 | 14,0 | 187,0 | 44,0 |
| PA 732 SF9 40 45 S | 31 | 20 | 1.1/4" | 1.1/2" | 420,0 | 63,5 | 14,0 | 195,5 | 52,0 |
| PA 740 SF9 32 45 | 38 | 24 | 1.1/2" | 1.1/4" | 420,0 | 54,0 | 14,0 | 205,5 | 47,0 |
| PA 740 SF9 45 | 38 | 24 | 1.1/2" | 1.1/2" | 420,0 | 63,5 | 14,2 | 224,0 | 51,0 |