

# PA 700 SF9 90

Utična armatura, SFS-CAT W90°

**HANSA FLEX**

## Osobine

**Oblast primene** Utična armatura za creva HD 700

**Priključak 1** SAE priključak priрубnice 6000 PSI

**Oblik zaptivke 1** ravno zaptivanje sa SF O-prstenom

**Skraćenica** SFS-CAT


**Podesno za** Caterpillar

**Uvezivanje** sa osiguračem kidanja (interlock)

**Obim isporuke** Pritisna nazuvica + pritisni priključak

**Materijal** čelik

**Površinska zaštita** galvanska prevlaka

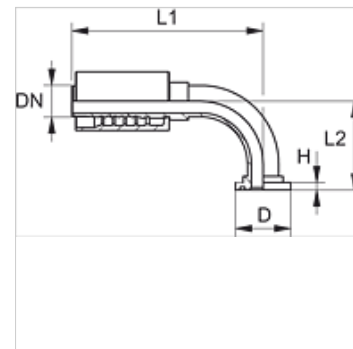

## Artikal

Naziv	DN	Veličina	col	Veličina spojnice	Radni pritisak (bar)	D (mm)	H (mm)	L1 (mm)	L2 (mm)
PA 720 SF9 90	19	12	3/4"	3/4"	420,0	41,3	14,2	127,5	67,5
PA 720 SF9 25 90	19	12	3/4"	1"	420,0	47,6	14,2	127,5	72,5
PA 725 SF9 20 90	25	16	1"	3/4"	420,0	41,3	14,2	144,0	83,5
PA 725 SF9 90	25	16	1"	1"	420,0	47,6	14,2	158,0	78,5
PA 725 SF9 32 90	25	16	1"	1.1/4"	420,0	54,0	14,2	158,0	85,0
PA 732 SF9 25 90 S	31	20	1.1/4"	1"	420,0	47,6	14,4	170,5	95,5
PA 732 SF9 90 S	31	20	1.1/4"	1.1/4"	420,0	54,0	14,4	169,5	96,0
PA 732 SF9 40 90 S	31	20	1.1/4"	1.1/2"	420,0	63,5	14,4	171,0	96,0
PA 740 SF9 32 90	38	24	1.1/2"	1.1/4"	420,0	54,0	14,0	192,0	100,0
PA 740 SF9 90	38	24	1.1/2"	1.1/2"	420,0	63,5	14,1	214,0	111,5