


# PN AF

Pritisna nazuvica, DKF

**HANSA FLEX**

## Osobine

|                           |   |
|---------------------------|---|
| <b>Oblast primene</b>     | Pritisna nazuvica za creva HD 100 do HD 400, KP, TE           |
| <b>Priključak 1</b>       | metrički navoj navrtke  |
| <b>Oblik zaptivke 1</b>   | 24° spoljašnji konus za colovanu cev francuske serije modela. |
| <b>Skraćenica</b>         | DKF   |
| <b>Seriya</b>             | French (imperial pipe - series gas)                           |
| <b>Materijal</b>          | čelik   |
| <b>Površinska zaštita</b> | galvanska prevlaka  |

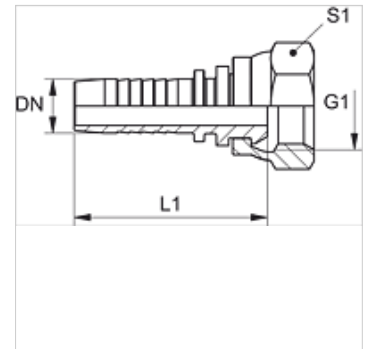

## Napomena

Odgovarajući priključak molimo da odaberete prema tipu creva.

## Artikal

| Naziv       | DN | Veličina | col   | Radni pritisak (bar) | G1         | Ø mm za cev spolja | L1 (mm) | S1 |
|-------------|----|----------|-------|----------------------|------------|--------------------|---------|----|
| PN 06 AF 10 | 6  | 4        | 1/4"  | 400,0                | M 20 x 1,5 | 13,25              | 51,5    | 24 |
| PN 08 AF 10 | 8  | 5        | 5/16" | 400,0                | M 20 x 1,5 | 13,25              | 51,5    | 24 |
| PN 10 AF    | 10 | 6        | 3/8"  | 400,0                | M 20 x 1,5 | 13,25              | 53,0    | 24 |
| PN 10 AF 13 | 10 | 6        | 3/8"  | 250,0                | M 24 x 1,5 | 16,75              | 54,0    | 30 |
| PN 13 AF    | 12 | 8        | 1/2"  | 250,0                | M 24 x 1,5 | 16,75              | 55,0    | 30 |
| PN 13 AF 16 | 12 | 8        | 1/2"  | 250,0                | M 30 x 1,5 | 21,26              | 58,0    | 36 |
| PN 16 AF    | 16 | 10       | 5/8"  | 250,0                | M 30 x 1,5 | 21,26              | 62,5    | 36 |
| PN 20 AF    | 19 | 12       | 3/4"  | 250,0                | M 36 x 1,5 | 26,75              | 70,0    | 41 |
| PN 25 AF    | 25 | 16       | 1"    | 160,0                | M 45 x 1,5 | 33,50              | 80,0    | 50 |