


PN AFLF 90 / PN AFSF 90

Pritisna nazuvica, DKFM W90°

HANSA FLEX

Osobine

| | |
|---------------------------|---|
| Oblast primene | Pritisna nazuvica za creva HD 100 do HD 400, KP, TE |
| Priključak 1 | metrički navoj navrtke |
| Oblik zaptivke 1 | 24° spoljašnji za metričku cev francuske serije modela. |
| Skraćenica | DKFM |
| Seriya | francuska (metrička cev) |
| Materijal | čelik |
| Površinska zaštita | galvanska prevlaka |

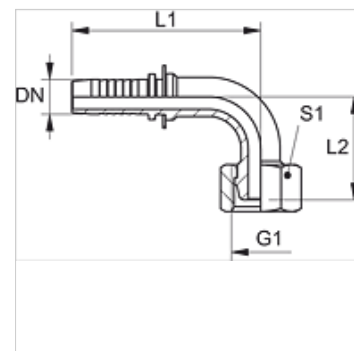

Napomena

Odgovarajući priključak molimo da odaberete prema tipu creva.

Artikal

| Naziv | DN | Veličina | col | Radni pritisak (bar) | G1 | Seriya | Ø za cev spolja (mm) | L1 (mm) | L2 (mm) | S1 |
|----------------------|----|----------|------|----------------------|------------|--------|----------------------|---------|---------|----|
| PN 16 AFLF 90 | 16 | 10 | 5/8" | 250,0 | M 27 x 1,5 | L | 18 | 91,0 | 57,0 | 32 |
| PN 20 AFLF 90 | 19 | 12 | 3/4" | 250,0 | M 30 x 1,5 | L | 22 | 108,0 | 65,0 | 36 |
| PN 25 AFLF 90 | 25 | 16 | 1" | 160,0 | M 36 x 1,5 | L | 28 | 125,0 | 73,0 | 46 |
| PN 16 AFSF 90 | 16 | 10 | 5/8" | 250,0 | M 27 x 1,5 | S | 20 | 91,0 | 57,0 | 46 |
| PN 20 AFSF 90 | 19 | 12 | 3/4" | 250,0 | M 33 x 1,5 | S | 25 | 109,0 | 66,0 | 41 |
| PN 25 AFSF 90 | 25 | 16 | 1" | 160,0 | M 39 x 1,5 | S | 30 | 125,0 | 63,0 | 46 |