


PN AOB 45

Pritisna nazuvica, DKOR W45°

HANSA FLEX

Osobine

Oblast primene	Pritisna nazuvica za creva HD 100 do HD 400, KP, TE
Priključak 1	BSP navoj navrtke
Oblik zaptivke 1	60° spoljašnji konus sa O-prstenom
Skraćenica	DKOR
Norma	ISO 8434-6 BS 5200
Materijal	čelik
Površinska zaštita	galvanska prevlaka

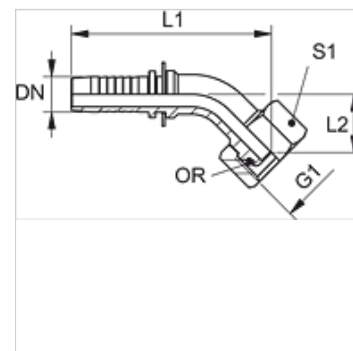

Napomena

Odgovarajući priključak molimo da odaberete prema tipu creva.

Artikal

Naziv	DN	Veličina	col	Radni pritisak (bar)	G1	L1 (mm)	L2 (mm)	S1	OR
PN 06 AOB 45	6	4	1/4"	400,0	G 1/4" -19	60,5	12,5	19	6,0 x 1,0
PN 10 AOB 45	10	6	3/8"	400,0	G 3/8" -19	69,5	16,5	22	8,1 x 1,6
PN 13 AOB 45	12	8	1/2"	350,0	G 1/2" -14	78,5	17,5	27	12,1 x 1,6
PN 16 AOB 45	16	10	5/8"	350,0	G 5/8" -14	96,0	24,5	30	13,1 x 1,6
PN 20 AOB 45	19	12	3/4"	315,0	G 3/4" -14	108,0	28,5	32	17,1 x 1,6
PN 25 AOB 45	25	16	1"	250,0	G 1" -11	137,0	35,0	38	22,1 x 1,6
PN 25 AOB 32 45	25	16	1"	250,0	G 1.1/4" -11	134,5	32,0	50	29,1 x 1,6
PN 32 AOB 45	31	20	1.1/4"	250,0	G 1.1/4" -11	165,0	45,5	50	29,1 x 1,6
PN 32 AOB 40 45	31	20	1.1/4"	-	G 1.1/2" -11	165,0	45,0	55	35,1 x 1,6
PN 40 AOB 45	38	24	1.1/2"	210,0	G 1.1/2" -11	187,5	49,5	55	35,1 x 1,6
PN 40 AOB 50 45	38	24	1.1/2"	210,0	G 2" -11	189,5	51,5	70	48,1 x 1,6
PN 50 AOB 45	51	32	2"	210,0	G 2" -11	231,5	67,0	70	48,1 x 1,6