


# PN AR 45

Pritisna nazuvica, DKR ravno W45°

**HANSA FLEX**

## Osobine

<b>Oblast primene</b>	Pritisna nazuvica za creva HD 100 do HD 400, KP, TE
<b>Priključak 1</b>	BSP navoj navrtke
<b>Oblik zaptivke 1</b>	ravno zaptivanje
<b>Skraćenica</b>	DKR ravan
<b>Materijal</b>	čelik
<b>Površinska zaštita</b>	galvanska prevlaka

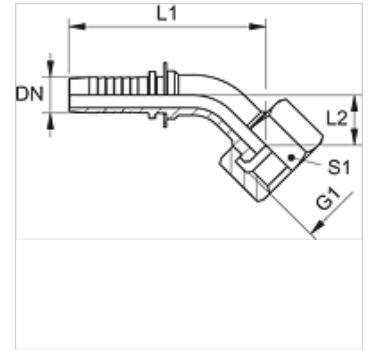

## Napomena

Odgovarajući priključak molimo da odaberete prema tipu creva.

## Artikal

Naziv	DN	Veličina	col	Radni pritisak (bar)	G1	L1 (mm)	L2 (mm)	S1
PN 10 AR 13 45	10	6	3/8"	315,0	G 1/2" -14	89,0	23,0	27
PN 13 AR 45	12	8	1/2"	315,0	G 1/2" -14	91,0	23,0	27
PN 16 AR 20 45	16	10	5/8"	250,0	G 3/4" -14	98,0	25,0	32
PN 20 AR 25 45	19	12	3/4"	200,0	G 1" -11	121,0	31,0	41