


# PN AR 90

Pritisna nazuvica, DKR ravno W90°

**HANSA FLEX**

## Osobine

<b>Oblast primene</b>	Pritisna nazuvica za creva HD 100 do HD 400, KP, TE
<b>Priključak 1</b>	BSP navoj navrtke
<b>Oblik zaptivke 1</b>	ravno zaptivanje
<b>Skraćenica</b>	DKR ravan
<b>Materijal</b>	čelik
<b>Površinska zaštita</b>	galvanska prevlaka

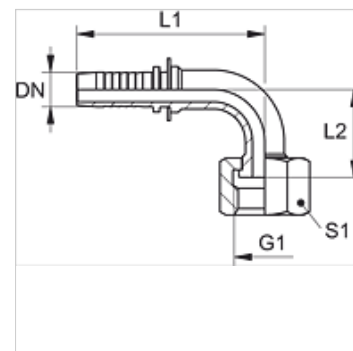

## Napomena

Odgovarajući priključak molimo da odaberete prema tipu creva.

## Artikal

Naziv	DN	Veličina	col	Radni pritisak (bar)	G1	L1 (mm)	L2 (mm)	S1
PN 06 AR 90	6	4	1/4"	350,0	G 1/4" -19	59,0	32,0	19
PN 10 AR 90	10	6	3/8"	350,0	G 3/8" -19	67,0	31,0	22
PN 10 AR 13 90	10	6	3/8"	315,0	G 1/2" -14	73,0	39,0	27
PN 13 AR 90	12	8	1/2"	315,0	G 1/2" -14	71,0	35,0	27
PN 13 AR 20 90	12	8	1/2"	250,0	G 3/4" -14	87,0	54,0	32
PN 16 AR 20 90	16	10	5/8"	250,0	G 3/4" -14	91,0	54,0	32
PN 20 AR 90	19	12	3/4"	250,0	G 3/4" -14	98,0	54,0	32
PN 20 AR 25 90	19	12	3/4"	200,0	G 1" -11	109,0	64,0	41
PN 25 AR 90	25	16	1"	200,0	G 1" -11	114,0	64,0	41
PN 32 AR 90	31	20	1.1/4"	160,0	G 1.1/4" -11	132,0	74,0	50

## Varijante proizvoda

PN AR 90 VA Pritisna nazuvica, DKR ravno W90°, plemeniti čelik