


# PN FL 90 VA

Pritisna nazuvica, BEL W90°

**HANSA FLEX**

## Osobine

<b>Oblast primene</b>	Pritisna nazuvica za creva HD 100 do HD 400, KP, TE
<b>Priključak 1</b>	Cevni nastavak
<b>Oblik zaptivke 1</b>	Priključak za rezni prsten
<b>Skraćenica</b>	BEL
<b>Norma</b>	ISO 8434-1
<b>Serijska</b>	lak
<b>Materijal</b>	plemeniti čelik

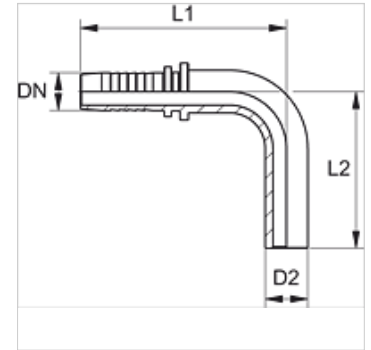

## Napomena

Završna montaža reznim prstenom mora se obaviti u kaljenom nastavku za predmontažu (VOM...).

Odgovarajući priključak molimo da odaberete prema tipu creva.

Ne koristiti kod novih konstrukcija; preporučujemo: PN...AOL...90 VA.

## Artikal

Naziv	DN	Veličina	col	Radni pritisak (bar)	D2 (mm)	L1 (mm)	L2 (mm)
PN 06 FL 04 90 VA	6	4	1/4"	250,0	6,0	62,3	32,5
PN 06 FL 90 VA	6	4	1/4"	250,0	8,0	68,3	37,0
PN 06 FL 08 90 VA	6	4	1/4"	250,0	10,0	72,8	40,0
PN 08 FL 90 VA	8	5	5/16"	250,0	10,0	70,8	41,5
PN 08 FL 10 90 VA	8	5	5/16"	250,0	12,0	77,8	45,0
PN 10 FL 08 90 VA	10	6	3/8"	250,0	10,0	70,8	41,5
PN 10 FL 90 VA	10	6	3/8"	250,0	12,0	77,8	45,0
PN 13 FL 90 VA	12	8	1/2"	250,0	15,0	84,8	49,0
PN 16 FL 90 VA	16	10	5/8"	-	18,0	93,0	65,0
PN 20 FL 90 VA	19	12	3/4"	-	22,0	112,0	75,5
PN 25 FL 90 VA	25	16	1"	100,0	28,0	127,5	98,0
PN 32 FL 90 VA	31	20	1.1/4"	100,0	35,0	174,0	127,0
PN 40 FL 90 VA	38	24	1.1/2"	100,0	42,0	174,0	127,0

## Varijante proizvoda

PN FL 90 Pritisna nazuvica, BEL W90°, čelik

## Dodatni elementi

VOM Nastavak za predmontažu