


# PN FS 45 VA

Pritisna nazuvica, BES W45°

**HANSA FLEX**

## Osobine

<b>Oblast primene</b>	Pritisna nazuvica za creva HD 100 do HD 400, KP, TE
<b>Priključak 1</b>	Cevni nastavak
<b>Oblik zaptivke 1</b>	Priključak za rezni prsten
<b>Skraćenica</b>	BES
<b>Norma</b>	ISO 8434-1
<b>Seriya</b>	težak
<b>Materijal</b>	plemeniti čelik

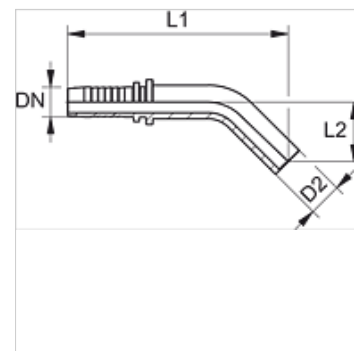

## Napomena

Završna montaža reznim prstenom mora se obaviti u kaljenom nastavku za predmontažu (VOM...).

Odgovarajući priključak molimo da odaberete prema tipu creva.

Ne koristiti kod novih konstrukcija; preporučujemo: PN...AOS...45 VA.

## Artikal

Naziv	DN	Veličina	col	D2 (mm)	L2 (mm)
PN 06 FS 03 45 VA	6	4	1/4"	6,0	22,0
PN 06 FS 04 45 VA	6	4	1/4"	8,0	22,0
PN 06 FS 45 VA	6	4	1/4"	10,0	22,5
PN 08 FS 06 45 VA	8	5	5/16"	10,0	25,0
PN 08 FS 45 VA	8	5	5/16"	12,0	24,0
PN 10 FS 06 45 VA	10	6	3/8"	10,0	25,0
PN 10 FS 08 45 VA	10	6	3/8"	12,0	45,0
PN 10 FS 45 VA	10	6	3/8"	14,0	-
PN 13 FS 45 VA	12	8	1/2"	16,0	32,0
PN 16 FS 45 VA	16	10	5/8"	20,0	31,0
PN 20 FS 45 VA	19	12	3/4"	25,0	42,0
PN 25 FS 45 VA	25	16	1"	30,0	-
PN 32 FS 45 VA	31	20	1.1/4"	38,0	-

## Varijante proizvoda

PN FS 45 Pritisna nazuvica, BES W45°, čelik