


# PN SF6 90 VA

Pritisna nazuvica, SFS W90°

**HANSA FLEX**

## Osobine

<b>Oblast primene</b>	Pritisna nazuvica za creva HD 100 do HD 400, KP, TE
<b>Priključak 1</b>	SAE priključak prirubnice 6000 PSI
<b>Oblik zaptivke 1</b>	ravno zaptivanje sa SF O-prstenom
<b>Skraćenica</b>	SFS
<b>Norma</b>	SAE J518 ISO 6162-2
<b>Materijal</b>	plemeniti čelik

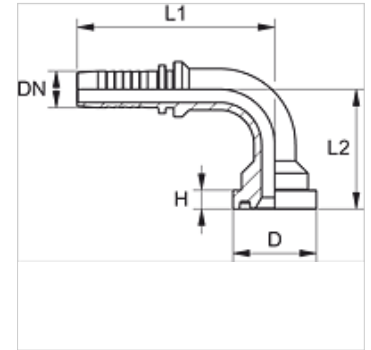

## Napomena

Odgovarajući priključak molimo da odaberete prema tipu creva.

## Napomene u vezi porudžbine

NBR зaptивке

ФГМ (витон) на захтев

## Artikal

Naziv	DN	Veličina	col	Veličina spojnice	Radni pritisak (bar)	D (mm)	H (mm)	L2 (mm)
PN 13 SF6 90 VA	12	8	1/2"	1/2"	420,0	31,8	7,7	56,0
PN 13 SF6 20 90 VA	12	8	1/2"	3/4"	420,0	41,3	8,8	63,5
PN 16 SF6 20 90 VA	16	10	5/8"	3/4"	420,0	41,3	8,8	63,5
PN 16 SF6 13 90 VA	16	10	5/8"	1/2"	420,0	31,8	7,7	60,0
PN 20 SF6 90 VA	19	12	3/4"	3/4"	420,0	41,3	8,8	70,0
PN 20 SF6 25 90 VA	19	12	3/4"	1"	420,0	47,6	9,5	72,0
PN 25 SF6 90 VA	25	16	1"	1"	420,0	47,6	9,5	78,0
PN 25 SF6 32 90 VA	25	16	1"	1.1/4"	420,0	54,0	10,3	91,0
PN 32 SF6 90 VA	31	20	1.1/4"	1.1/4"	420,0	54,0	10,3	92,0
PN 32 SF6 40 90 VA	31	20	1.1/4"	1.1/2"	420,0	63,5	12,6	95,0
PN 40 SF6 90 VA	38	24	1.1/2"	1.1/2"	420,0	63,5	12,6	104,0
PN 40 SF6 50 90 VA	38	24	1.1/2"	2"	420,0	79,4	12,6	122,0
PN 50 SF6 90 VA	51	32	2"	2"	420,0	79,4	12,6	139,0

## Varijante proizvoda

**PN SF6 90** Pritisna nazuvica, SFS W90°, čelik