


# PN WEO S 90

Pritisna nazuvica, WEO S W90°

**HANSA FLEX**

## Osobine

<b>Oblast primene</b>	Pritisna nazuvica za creva HD 100 do HD 400, KP, TE
<b>Priključak 1</b>	WEO utikač
<b>Oblik zaptivke 1</b>	Rukavac zaptiven O-prstenom
<b>Materijal</b>	čelik
<b>Površinska zaštita</b>	galvanska prevlaka

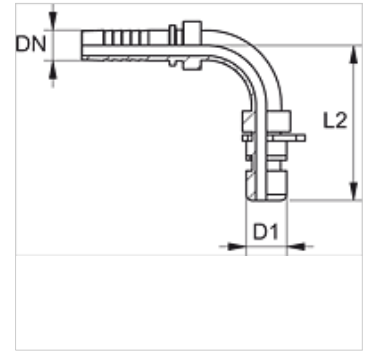

## Napomena

Odgovarajući priključak molimo da odaberete prema tipu creva.

## Opis

Samo se ispravlja i sprečavanje torziona naprezanja.

## Artikal

Naziv	DN	Veličina	col	Radni pritisak bar	Konstrukciona veličina	Ø D1 (mm)	L2 (mm)
PN 06 WEO 10 S 90	6	4	1/4"	PN 350	1/4"	10,0	48,5
PN 06 WEO 13 S 90	6	4	1/4"	PN 350	3/8"	13,0	54,0
PN 08 WEO 13 S 90	8	5	5/16"	PN 350	3/8"	13,0	58,0
PN 10 WEO 13 S 90	10	6	3/8"	PN 350	3/8"	13,0	58,0
PN 10 WEO 16 S 90	10	6	3/8"	PN 350	1/2"	16,0	59,5
PN 13 WEO 16 S 90	12	8	1/2"	PN 350	1/2"	16,0	68,0
PN 13 WEO 23 S 90	12	8	1/2"	PN 350	3/4"	23,0	82,0
PN 16 WEO 23 S 90	16	10	5/8"	PN 350	3/4"	23,0	100,0
PN 20 WEO 23 S 90	19	12	3/4"	PN 350	3/4"	23,0	100,0

## Rezervni delovi

<b>WEO S DEMORING</b>	WEO prsten za demontažu
<b>WEO S M ANSCHLAG</b>	WEO graničnik za montažu