


SF O-RING PU

O-prsten za SAE-priključak prirubnice

HANSA FLEX

Osobine

| | |
|------------------|-----------------------|
| Norma | SAE J518 |
| Temperatura min. | -30 °C |
| Temperatura max. | 100 °C |
| Materijal | poliuretan 93 Shore A |

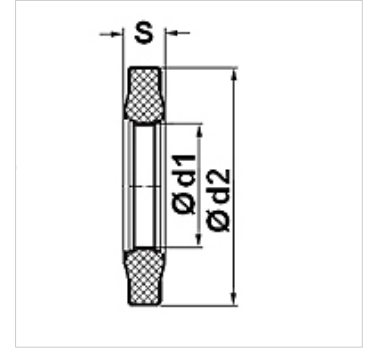

Opis

Veći stepen zaptivanja usled dodatne zaptivne ivice.

Artikal

| Naziv | DN* | Veličina | col | Ø d1 (mm) | Ø d2 (mm) | S (mm) |
|----------------|-----|----------|--------|--------------|--------------|-----------|
| SF ORING 13 PU | 12 | 8 | 1/2" | 18,40 | 25,40 | 3,45 |
| SF ORING 20 PU | 19 | 12 | 3/4" | 24,80 | 31,80 | 3,45 |
| SF ORING 25 PU | 25 | 16 | 1" | 32,70 | 39,70 | 3,45 |
| SF ORING 32 PU | 31 | 20 | 1.1/4" | 37,50 | 44,50 | 3,45 |
| SF ORING 40 PU | 38 | 24 | 1.1/2" | 46,80 | 53,80 | 3,45 |
| SF ORING 50 PU | 51 | 32 | 2" | 56,40 | 63,40 | 3,45 |

Varijante proizvoda

SF O-RING V