


# JG 09 (zyl.)

Uvrtni navojna spojnica, ugao 90°

**HANSA FLEX**

## Osobine

<b>Oblast primene</b>	Primena u oblastima pneumatike, vakuuma i prehrambene industrije
<b>Priključak 1</b>	BSP spoljni cilindrični navoj
<b>Oblik zaptivke 1</b>	zatvoreni O-prsten na uvrtnom navojnom nastavku
<b>Priključak 2</b>	Utični naglavak
<b>Konstrukcija</b>	ugao 90°
<b>Konstrukcija</b>	Uvrtna navojna spojnica
<b>Boja</b>	crna
<b>Mediji</b>	Vazduh tečni medijumi inertni gasovi npr. N <sub>2</sub> /CO <sub>2</sub>
<b>Materijal</b>	Telo od acetat kopolimer; O-prsten od nitrila

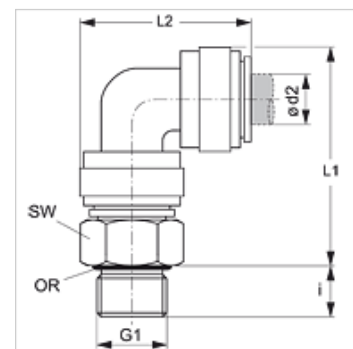

## Artikal

Naziv	Ø d2 (mm)	G1	i (mm)	L1 (mm)	L2 (mm)	SW (mm)
JG 09 04 11 E	4	G 1/8" -28	5,5	30,0	24,0	14
JG 09 04 12 E	4	G 1/4" -19	8,0	31,0	24,0	17
JG 09 05 11 E	5	G 1/8" -28	5,5	30,0	24,0	14
JG 09 05 12 E	5	G 1/4" -19	8,0	31,0	24,0	17
JG 09 06 11 E	6	G 1/8" -28	5,5	34,0	27,0	15
JG 09 06 12 E	6	G 1/4" -19	8,0	35,0	27,0	17
JG 09 08 11 E	8	G 1/8" -28	5,5	36,0	30,0	17
JG 09 08 12 E	8	G 1/4" -19	8,0	37,0	30,0	17
JG 09 08 13 E	8	G 3/8" -19	9,5	37,0	30,0	22
JG 09 10 12 E	10	G 1/4" -19	8,0	42,0	35,0	20
JG 09 10 13 E	10	G 3/8" -19	9,5	42,0	35,0	22
JG 09 10 14 E	10	G 1/2" -14	12,5	42,0	35,0	27
JG 09 12 13 E	12	G 3/8" -19	9,5	50,0	44,0	26
JG 09 12 14 E	12	G 1/2" -14	12,5	50,0	44,0	30
JG 09 15 13 E	15	G 3/8" -19	11,3	65,5	50,6	22
JG 09 15 14 E	15	G 1/2" -14	14,5	65,5	50,6	27
JG 09 18 14 E	18	G 1/2" -14	14,5	77,0	59,7	27
JG 09 22 14 E	22	G 1/2" -14	14,5	82,0	66,0	27
JG 09 22 16 E	22	G 3/4" -14	17,0	83,6	66,0	37

nedostajuće mere mogu se dobiti na zahtev

## Pribor

<b>JG 18 S</b>	Sigurnosni prsten za utikačku spojnicu
<b>JG 19 E</b>	Zaštitan kapa za utikačku spojnicu