


# TR T VB T

Spojnice za Tecalan cevi

## Osobine

Posebne karakteristike	TÜV atest
Konstrukcija	T oblik
Konstrukcija	Utikačka spojnica
Materijal	čelik
Površinska zaštita	galvanska prevlaka
Radni pritisak	Max. 10 bar

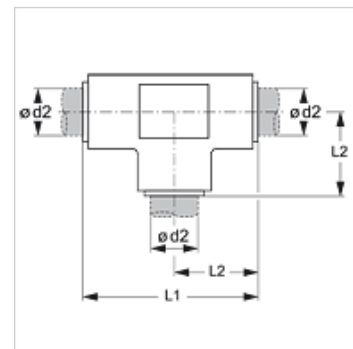

## Artikal

Naziv	$\varnothing d2$ (mm)	L1 (mm)	L2 (mm)
TR 06 T VB T	6	42,0	21,0
TR 08 T VB T	8	45,8	22,8
TR 10 T VB T	10	54,2	27,1
TR 12 T VB T	12	64,2	32,1
TR 15 T VB T	15	77,0	38,5